

Töölis **INT'L**

DESIGN & MODELING CATALOG BOOK

No.14
English
Edition

DESIGN & MODELING CATALOG BOOK

TOOLS INT'L

CONTENTS

COMPANY PROFILE	2
BASICS OF CLAY MODELING	4
INDUSTRIAL CLAY	6
CLAY MODELING EQUIPMENT	14
CLAY MODELING TOOLS	16
CLAY MODELING FILM	31
MODELING CHECK FOIL	39
MODELING SHEET CHROME SILVER	40
RENDERING TAPE / MODELING TAPE	43
OTHER DESIGN MATERIALS	50



Our original company, IZUMIYA (Too) was established in 1919 as an artists' supply store. Over the years IZUMIYA evolved to become Too group, encompassing companies related to design support, IT and media. In 2009, 90 years after the foundation of IZUMIYA, we established TOOLS INT'L Corp. to focus on our original clay series, modeling materials, equipment, design materials, school teaching materials and special design workshops.

Our company specializes in providing materials and support for designers at every step of the way. With 100 years of experience in the field of design supplies, we have accumulated the knowhow to serve designers and modelers in the current age.

We produce and supply our original products, which we have developed and perfected in response to our customers' needs. Our original products are researched, developed, and quality tested in Japan. Although we first developed our clay formula in 1981, our research team is constantly researching and developing new formulas in response to customer feedback. Our products are well established in advanced automotive design regions like the USA and Europe, as well as high growth regions such as China and India. Our products are well-loved staples in studios across the globe.

Business Functions:
Encompassing business in manufacturing and sales of car design materials, car modeling apparatus, design materials, painting materials, stationery, design equipment, R&D, educational training for business personnel and all accompanied businesses.

Company Profile

Trade Name	TOOLS INTERNATIONAL Corporation
President & CEO	Gota Ishii
Business Functions	Relating business in manufacturing and sales of the car design material, car modeling apparatus, design materials, painting materials, stationeries, design equipments, R&D, educational business for personnel training and all accompanied business.
Founded	February 2, 2009
Head Office	Toranomon 36 Mori Building, 3-4-7 Toranomom, Minato-ku, Tokyo 105-0001, Japan
Paid Capital	JPY 98,000,000
Employees	45

History

- 1919
IZUMIYA Artists' Supply Store' in Shibuya, Tokyo following 'Bauhaus' in Germany.
- 1945
After a temporary closure post-WWII, business began operations again in Ikebukuro, Tokyo.
- 1950
'IZUMIYA Artists' Supply Store' is renamed 'Izumiya Limited.'
- 1952
Izumiya Limited expands business to include trade and sales. Izumiya helped to spread modern Western design trends in Japan.
- 1961
Commenced importing 'Industrial Clays' from the US.
- 1970
'Izumiya Limited' is renamed and reorganized to become 'Izumiya Corporation.'
- 1972
Famous Detroit car modeler Ron Martin is invited for a clay modeling seminar in Japan. With his help, clay modeling techniques became popular in Japan.


- 1981
Commenced domestic production of 'Industrial Clay J-525'.


- 1986
Developed 'Clay Modeling Film'.


- 1987
Developed 'Copic' alcohol markers that are widely used by designers.


- 1992
'Izumiya Corporation' is renamed 'Too Corporation.'
- 1998
Developed 'Clay Modeling Check Foil'.


- 1999
The 'Too Corporation' sales departments for art supplies, clay, educational materials, equipment, design and modeling materials were grouped together to become a new entity known as 'Tools Corporation.'
- 2002
Tools Corporation develops our original 100% sulfur-free 'Industrial Clay NS' series. The NS series is widely adopted by automotive studios worldwide.



- 2007
Developed our 'Clay Warmer PU-01'.


- 2008
Developed 'Chrome Silver' film.
Developed 'Clay Shaper NSD-120'.


- 2009
'Tools Corporation' international sales department for clay, modeling materials, equipment, automotive design educational materials separated to become 'TOOLS INT'L Corp.'


- 2010
Developed the 'Modeling Table MT01'.
- 2012
Released the 'Marker Sketch Pad A4 Standard'.
- 2019
Too Group's 100th Anniversary.
Establishment of Too (Shanghai) Corporation.
Establishment of Too Corporation Americas.


- 2022
Office relocated to Shibuya-ku, Sarugakucho, Tokyo


- 2023
Exhibited at the Japan Mobility Show 2023 'Out of KidZania'.


- 2025
Exhibited at the Japan Mobility Show 2025 'Out of KidZania'.


- 2026
Developed 'Printable Flex Sheet'.
Developed 'Clay Modeling Film WIDE'.



▶▶▶ Making a core/armature



Based on a core drawing, create a foam armature for the clay model. Make the core approximately 10mm smaller than the actual core drawing. If anticipating large design changes, create a smaller core.

▶▶▶ Clay rough application



After warming the clay, apply the clay to the core. The first layer of clay should be thin in order to adhere to the core. Before the temperature of the first layer comes to room temperature, apply more layers of clay to complete the core. When applying clay layers, it is important to avoid creating air pockets.

▶▶▶ Scraping—Finishing



Using a template, former gauge, surface gauge, height gauge etc. to improve accuracy. Use Clay Modeling Tools to shave the clay surface. It is important to check clay surface with Clay Modeling Film and Modeling Check Foil. Then repeat application and shaving process.

▶▶▶ Fitting



Fitting is the process to make clay models look like realistic cars, confirm final design and style/coloring. After finishing the clay surface, use Clay Modeling Film for fitting.

Industrial Clay ▶Page 6



"Industrial Clay NS Series" is absolutely sulfur free, and can be incinerated after use. It is an environmentally friendly new generation clay.

Clay Warmer PU-01 ▶Page 14



Recommended for use at design schools or small design firms. Temperature settings for either 45°C or 60°C. It is a portable size, and with its capacity, can hold 15 billets at once. This capacity is ideal for making scale models.

Hand Soap for Clay Use ▶Page 50



This soap is used to remove oil stains and epoxy paint. Good to use after using clay. Refill packs are also available.

Hand Gloves ▶Page 51



These gloves have excellent fit and are recommended for applying clay. Feels like applying clay with bare hands. The palm of the gloves have thin rubber to protect from heat and friction. The back of the gloves have thin nylon fiber to keep hands dry and clean.

Hand-Wash Brush ▶Page 50



This brush can be used for removing clay shavings from fingernails and fingertips easily.

Clay Modeling Tools

[Petite Clay Tools]

Designed to sculpt small-scale models and fine interior parts.



[HG Chokkaki]

Use for rough scraping. A higher-grade Series.



[SK Chokkaki]

Use for rough scraping. SK (carbon tool steel) Series.



Former Gauge ▶Page 30



Metal wire gauge used for replicating sectional shapes.


[Chokkaki]

Use for rough scraping.



[Rake]

Use for rough scraping. Slightly curved.

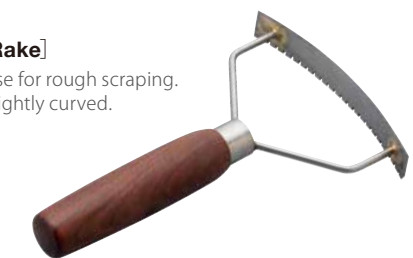


[Trapezoid Rake]

Use to finish clay surfaces after using rakes.



[Triangle Rake]

Use to shape fine parts.

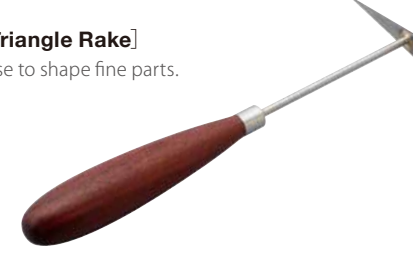

[Double Sided Rake]

Use for large inner curves.



▶Page 16


[Wire]

Use for shaping concaves and fine details.



[Steel]

Used to smooth clay surfaces.

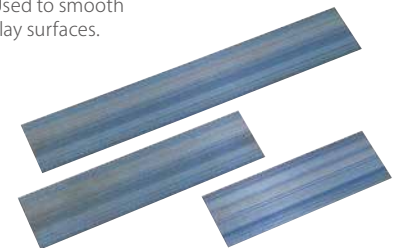

Modeling Tape ▶Page 43



Highly recommended for plotting key line drawings or shape adjustment on clay models.

Metal Spatula ▶Page 51

Use to remove clay shavings from the floor and surface plates.



Clay Modeling Film ▶Page 31



Clay Modeling Film is stretchable enough to apply to three dimensional curved surfaces. Main usage: Checking clay surface shapes of exteriors & interiors/checking highlights/fitting.

Modeling Check Foil ▶Page 39



Thin aluminum foil used to check clay surfaces during clay modeling.

Whetstone ▶Page 23



For safety reasons, Clay Modeling Tools are unsharpened. Blades need to be sharpened before use. Please sharpen blades with whetstones before use.





Industrial Clay

Our industrial clay is a synthetic clay used for designing 3D modeling products such as automobiles, motorcycles and consumer electronics. Our clay has minimal expansion/shrinkage and retains its hardness at room temperature (around 25°C). Our clay hardens at room temperature and remains hard unless heated. Special ovens are used to warm the clay into a consistent and malleable texture at 60°C. As many times as necessary, our industrial clay can be reapplied or shaved in order to sculpt your model. TOOLS INT'L Industrial Clay is completely sulfur free and recyclable with our Clay Shaper.

NS60L

The NS series clay is 100% sulfur free! Unlike traditional industrial clays which use sulfur as filler, we developed Japan's first sulfur free industrial clay. Our NS series weighs 30% less than sulfur-based clay. The NS60 series has a working temperature of 60°C.

*Please DO NOT mix different types of clay due to the fact that the quality will be affected.

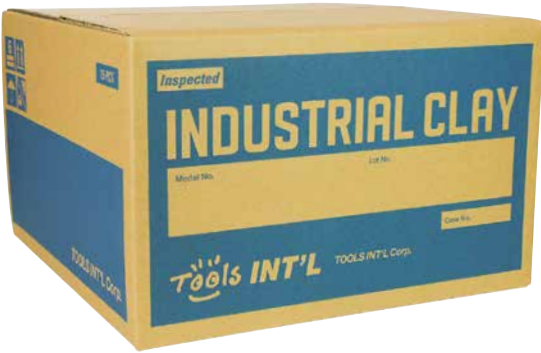

Product Name	Working Temp	* Hardness (25°C)	Specific Gravity	Odor	Billet Size	Mass	Unit (per box)
NS60L	60°C	Approx 82	Approx 1	Slightly	Approx 56φ×275mm	Approx 650g	15

* Measurement by ASKER Durometer Type C which is based on JIS K 7312. * The color of the clay here might not be the same as actual color due to printing.

Why We Developed Sulfur Free Clay

Industrial Clay is wax and oil based synthetic clay originally formulated for industrial and automotive design. With industrial-type clay, you can create large-scale models that have a beautiful, smooth and slick finish.

Unlike hobby clays, industrial clay remains hard at room temperature, and softens to become workable when heated to 60°C, which is ideal for crafting models.

We, TOOLS INT'L Corp., create custom clays at request. Our clays are completely customizable to softness/hardness, elongation, stickiness, color and texture. Our high performing clays are designed to allow the modeler to reach 0.1mm accuracy with a consistent finish.

In addition to uniform quality, we have also developed our clays to be an eco-friendly alternative to traditional sulfur-based clays. In the automotive industry, consumers and companies are holding suppliers responsible for their environmental footprints. We at TOOLS INT'L Corp. also care about our environmental impact and our researchers have considered raw materials all over again to develop completely sulfur free, recyclable clays that are now widely used domestically and internationally.

Properties of Sulfur Free Clay

• Consideration for the Environment

Our clay is developed to be completely sulfur-free, therefore it can be safely incinerated without using smoke extractors. Our NS series can be safely and completely incinerated, making it compatible with landfill-free initiatives even on an industrial scale.

30% lighter than sulfur-based clays (specific gravity of NS Series= 0.97), choosing TOOLS INT'L Corp. clays can help reduce CO2 impacts from transportation.

• Industrial Clay in Model Studios

We have formulated our clay to be lightweight so that it will be remarkably easy to handle, making a safer studio environment for modelers working with large-scale models. Studios without smoke extractors must consider security and confidentiality regarding the disposal of clay models. However, our clay can be safely incinerated so that models can be disposed of discreetly with minimal environmental impacts. Lastly, compared to sulfur-based clays, our clays are designed to have minimal odor and improved workability.

CAUTION Please do not store under high temperatures or humidity.

NS60 L

IDC-02006



Hardness (25°C) Approx **82**

Specific Gravity Approx **1**

NS60 GWK2

IDC-02012



Hardness (25°C) Approx **82**

Specific Gravity Approx **1**

NS60 LG

IDC-02009



Hardness (25°C) Approx **82**

Specific Gravity Approx **1**

NS58RC


Industrial Clay NS58RC does not contain any sulfur as a filler (absolutely sulfur free clay). Industrial Clay NS58RC is developed for improved milling. Tapes adhere well to this clay.

*Please DO NOT mix different types of clay due to the fact that the quality will be affected.



NS58 RC

IDC-04011




Hardness (25°C) Approx **79**

Specific Gravity Approx **1**

NS60 Series Color variations

Unlike other clays used for automotive model making, our industrial clay is absolutely sulfur-free! Our NS series is next generation eco-friendly clay.



Our Clay

- Easily disposable and free of harmful materials.
- Does not experience shrinkage.
- Crack-free.
- Designed specifically to be used with our Clay Modeling Film.
- Excellent texture and plasticity for model making.
- Smooth application when heated.
- Designed for use with hands and machinery.

CAUTION Please do not store under high temperatures or humidity.

Instructions for Use

- Heating temperature is 60°C.
- Heating time is 3 hours using our clay oven.
- Does not require a heat gun to heat the clay model surface for clay application.

* DO NOT heat our industrial clay over the recommended temperature as irreversible changes to the physical properties of the clay may occur.
* DO NOT Please mix different types of clay due to the fact that the quality will be affected.
* Measurement by ASKER Durometer Type C which is based on JIS K 7312.
* The color of the clay here might not be the same as actual color due to printing.



FAQs for Industrial Clay



1. How should clay be stored?

Storage Conditions:

- Please do not store under high temperatures, humidity and avoid direct sunlight.
- The appropriate temperature for storage is under 25°C.
- Please keep boxes sealed when not in use.
- Once the clay is removed from the box, we recommend that clay should be used as soon as possible to avoid deterioration.

2. Can microwave ovens be used to warm up clay?

- Do not use microwave ovens to heat clay! Our clays are designed to be evenly heated at the exact temperature of 60°C or 58°C, which can't be achieved with microwaves. Microwaves heat from the core of the clay, which as it warms, expands in volume. As a result, if the clay's core rapidly warms while the surface remains hard, an explosion may occur.

3. What is the warming temperature for clay?

- For the NS60 Series, the oil and wax components are designed to be warmed up to 60°C. At this designated temperature, our clays soften for proper use. Heating our clays above or below the specified temperatures can result in changes to the physical properties of our clay, which is not ideal for use.
- Proper warming time is 3 hours when using controlled temperatures.
- Do not attempt to warm these clays with less time and higher temperature.

4. Is the clay too hot to handle with bare hands?

- Low temperature burns may occur on skin if applying clay with bare hands. We recommend using latex gloves, or similar types of gloves.

5. Is it possible to mix different types of clays together? (Even types with the same working temperature?)

- Each type (even types with the same working temperature) has different properties. If mixing different clays for use, color inconsistency, cracking, peeling etc. may occur after molding. We do not recommend mixing our clays.

6. Are there any precautions to take when reapplying clay to models?

- It is important that clay is adhered well. In order to do so, you should be careful to prevent air bubbles between layers. Any air bubbles may cause cracks in the model. If possible, we recommend using a heat gun to warm the surface of your clay model before applying more clay.

7. Is it possible to recycle (reuse) clay?

- Yes, our clay can be recycled and reused after kneading and de-airing through our clay shaper. Please note that mixing clay with other contaminants will compromise the quality of the clay.

Compared to new clay, recycled clay has the following characteristics and features:

- Physically, recycled clay becomes harder, heavier, drier and loses some of its tackiness.
- Recycled clay may become darker after the recycling process.
- Clay can be recycled a few times at most; however, we do not have a standard measurement of times that our clay can be recycled.

8. After finishing the clay model, how should it be painted?

- Our clay is not designed to be directly painted on. Directly painting the model is not recommended because solvents in paint can cause the clay surface to melt. However, our "Clay Modeling Film" is crafted specifically to be used to color industrial clay models.

9. Can clay be disposed of by incineration?

- Our clay does not contain any sulfur. Thus, it is possible to dispose of our clay by incineration.
- *It is hazardous to dispose of any clay containing sulfur (even small amounts) by incineration. We strongly advise against doing so.

Tools INT'L

CLAY
A Universal Language

A Special Talk Between Two Veteran Clay Modelers

Who Have Worked at the Forefront of Car Design in Japan and the U.S.!

Two clay modelers who have been involved in numerous automotive design projects share their thoughts and approaches to design, as well as insights into the rapidly advancing fields of AI and digital technologies. The video also features specially filmed scenes of clay modeling created exclusively for this production. This is a must-watch for anyone interested in car design, aspiring modelers, those passionate about design or the arts, or anyone looking to spark their creativity.



CAST

Akira Matsuda

Joined Toyota Motor Corporation at the age of 19 and was assigned to the model production division of the design department.

He was dispatched to design studios such as Caltly Design Research and Techno Art Research, where he worked on many new vehicle model projects.

As a "Takumi" (master craftsman) of model creation at Toyota, he was responsible for ensuring model quality in the design process and training future talent.

After leaving Toyota in 2023 at the end of his contract, he signed an agent agreement with Tools International, where he continues to work today.

Lloyd VandenBrink

Began working as a clay modeler at Ford Motor Company in 1989. As a project manager and truck studio manager, he handled timeline development, staffing forecasts, hiring, studio coordination, and supervision of digital sculptors.

In 2008, he became an adjunct professor of clay modeling at Lawrence Technological University, where he helped develop and teach the clay modeling curriculum.

After leaving Ford in 2021, he began consulting activities with Tools International, where he continues to work today.

Now available on the official Tools International YouTube channel!

TOOLS INT'L channel @toolsintlchannel4160



About Tools International's Initiatives

Tools International collaborates with the Japan Car Modeler Association, a group of active clay modelers working at Japanese mobility manufacturers, to promote the joy of craftsmanship and share the challenges of three-dimensional modeling.

や
っ
て
み
よ
う
ク
レ
イ
モ
デ
ル
造
形

Japan Mobility Show Out of KidZania



Clay Modeling Equipment


Our equipment is built for reliability.
For reliable modeling equipment,
please inquire with TOOLS INT'L Corp.

TOOLS INT'L Corp. takes steps to explore new materials used for product design. After years of experience working with R&D, designers and modelers, we respond to our customers' needs and provide dependable products for the industry.



Clay Ovens & Clay Warmers

The main function of the clay ovens and warmers is to warm up the clay and maintain a consistent temperature for ready-to-use workable clay. The equipment is used by many automakers around the world to maintain the consistency of clay in a controlled environment.

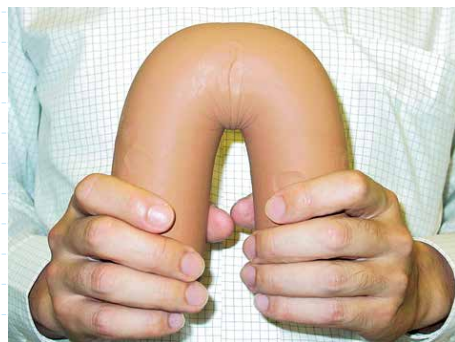


Warmed up clay by Clay Oven & Clay Warmer.



Clay Oven 350L

The temperature set by the automated temperature controls safely warms the clay within the range of $\pm 1^{\circ}\text{C}$. Our oven warms the core of the clay for consistent softness. The door of the oven is equipped with a reinforced pane of glass for easy visibility. Easy to clean, stainless steel trays are rust free. The oven also features safety precautions to prevent leaks, thermal relay, overheating and falling trays.

Model: Clay Oven 350L
Number of trays: 4
Outer dimension: W710×H1770×D690mm
Mass: 126kg
Preset temperature: 40°C~70°C



Clay Warmer PU-01

This warmer is made specifically for industrial clay. The temperature settings are set for either 45°C or 60°C with a switch. Its portable size can hold up to 15 billets at once. This capacity is ideal for making scale models. This warmer is convenient, lightweight and space saving.

Model: PU-01
Max capacity: 15 billets
Number of trays: 3
Outer dimension: W450×H450×D410mm
Mass: 13kg
Preset temperature: 45°C/60°C with switch



Clay Shaper

The clay shaper is an extrusion and de-airing machine designed for recycling industrial clay. The clay shaper uses a vacuum to remove air bubbles and moisture from used clay. If dies are used, it is possible to mold clay into various shapes for point modeling.

Model: NSD-120
Overall length: 2120mm
Overall width: 520mm
Overall height: 1083mm
Mass: 375kg
Machine capacity:
80kg or 120kg/hour
It depends on the type of clay.




Mylar Film

with 100mm grid section

This milky-white film with 100mm grid section is used for tape rendering and dimension rendering using 217J Tape or IC Free Tape. It is possible to mark the surface of this film with pencil.

19 facets/roll
Thickness: 0.14mm
Size: 1700mm×5m
(100mm Grid 17×50 measure)×19 facets

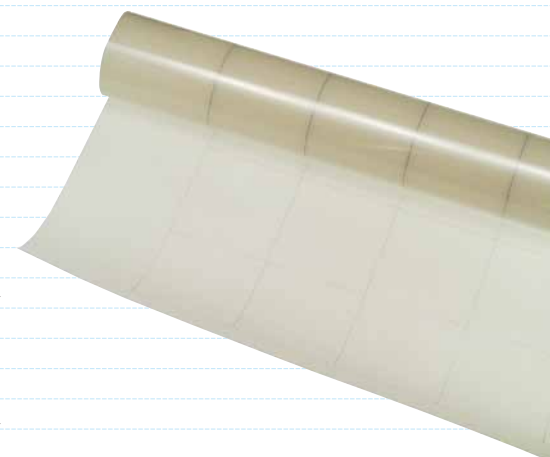

CLAY MODELING TOOLS

Various types of Clay Modeling Tools used in clay modeling for rough-scraping, detailed parts, and finishing.

*Please confirm stock before placing an order.
*Specifications are subject to change without notice due to material availability.

Petite Clay Tools

Made in Korea

Custom-made tools for clay modeling. Designed to sculpt small-scale models and fine interior parts.
These tools are available in 10 styles for versatile sculpting.

[No.1]

●Petite Clay Tool No.1
CMT-34001 Stainless Steel
a21×b11×c48mm



[No.3]

●Petite Clay Tool No.3
CMT-34003 Stainless Steel
a35×b13×c50mm



[No.2]

●Petite Clay Tool No.2
CMT-34002 Stainless Steel
a35×b13×c50mm



[No.4]

●Petite Clay Tool No.4
CMT-34004 Stainless Steel
a20×b11×c48mm



[No.5]

●Petite Clay Tool No.5
CMT-34005 Stainless Steel
a50×b10×c38mm



[No.8]

●Petite Clay Tool No.8
CMT-34008 Stainless Steel
a23×b15×c47mm



[No.6]

●Petite Clay Tool No.6
CMT-34006 Stainless Steel
a26×b16×c50mm



[No.9]

●Petite Clay Tool No.9
CMT-34009 Stainless Steel
a20×b19×c49mm




[No.7]

●Petite Clay Tool No.7
CMT-34007 Stainless Steel
a21×b21×c49mm



[No.10]

●Petite Clay Tool No.10
CMT-34010 Stainless Steel
a22×b21×c48mm

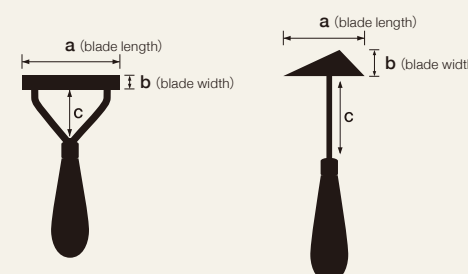

CAUTION Clay Modeling Tool

Each tool is delivered not fully whetted with the intention that customers will whet the blade to their preference. It is also a safety precaution. If the blade arrives with deficiency, we will offer a replacement.

HG Series

Top-Quality
MADE IN
JAPAN
Tsubame-Sanjo

[HG Chokkaki]

A higher-grade version of our Chokkaki tool used by modelers to scrape clay into flat or slightly curved surfaces. Made with Japanese 'aogami', blue steel. The HG Chokkaki is made of harder and more durable steel compared to our other series. Crafted in Tsubame-Sanjo, Japan—one of the world's leading metal industry towns.




●HG Chokkaki 125mm
CMT-31001
a125×b25×c68mm

[HG Triangle Rake]


A higher-grade version of our Triangle Rake used for fine, intricate modeling. Made with Japanese 'aogami', blue steel. The HG Triangle Rake is made of harder and more durable steel compared to our other series. Crafted in Tsubame-Sanjo, Japan—one of the world's leading metal industry towns.



●HG Triangle Rake Fine Tip
CMT-31003
a58×b19×c120mm

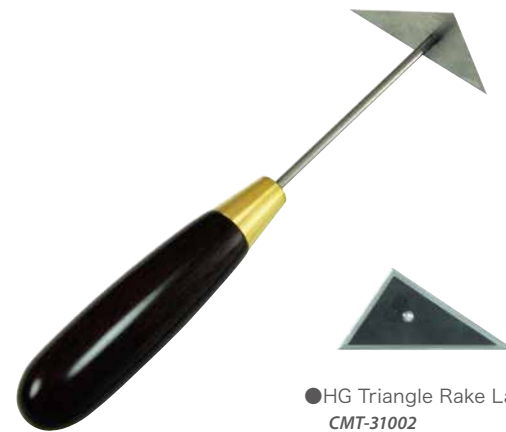

●HG Triangle Rake Large
CMT-31002
a69×b33×c95mm

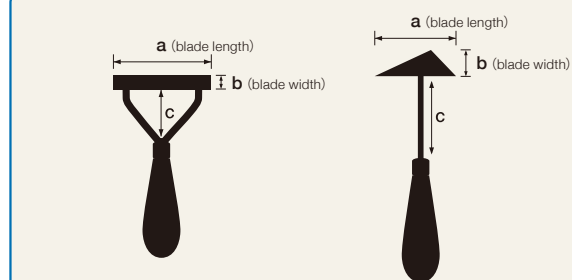**CAUTION** Clay Modeling Tool

Each tool is delivered not fully whetted with the intention that customers will whet the blade to their preference. It is also a safety precaution. If the blade arrives with deficiency, we will offer a replacement.

Basic Model

Top-Quality
MADE IN
JAPAN
Tsubame-Sanjo

[Chokkaki]

The Chokkaki is a standard tool used by modelers to scrape clay into flat or slightly curved surfaces. The Chokkaki's saw-blade is designed to achieve smooth surfaces with low resistance. Crafted in Tsubame-Sanjo, Japan—one of the world's leading metal industry towns.



●Chokkaki 50mm
CMT-35001
a51×b17×c37mm



●Chokkaki 75mm
CMT-35002
a76×b20×c43mm



●Chokkaki 100mm
CMT-35003
a101×b20×c50mm

[Finishing Scraper]

Finishing Scraper as the name suggests is used in finalizing shapes prior to using a steel. They vary in shape and size depending on the particular task that needs to be done.



●Finishing Scraper Small
CMT-33101
a32×b9×c53mm

[Finisher]

Finisher as the name suggests is used in finalizing shapes prior to using a steel. They vary in shape and size depending on the particular task that needs to be done.



●Finisher Medium
CMT-33002
a47.5×b16×c55mm



●Finisher Large
CMT-33003
a65.5×b19×c60mm

Clay Modeling Tools III Series

Made in China

Limited Stock

Clay Modeling Tool III Series will be discontinued once current stock runs out due to specification changes. Please check availability before ordering.

[ChokkakiIII]

The Chokkaki is for shaping clay into flat or slightly curved surfaces. Various sizes are used for rough scraping. The Chokkaki's saw-blade is designed to have low resistance when scraping, so surfaces can be levelled with ease.



●ChokkakiIII 50mm
CMT-01011
a52xb12xc39mm



●ChokkakiIII 125mm
CMT-01014
a125xb19xc62mm



●ChokkakiIII 75mm
CMT-01012
a76xb19xc43mm



●ChokkakiIII 150mm
CMT-01015
a152xb27xc67mm



●ChokkakiIII 100mm
CMT-01013
a101xb19xc54mm

[RakeIII]

Rakes are tools for shaping the clay as you scrape it off. Primarily used for rough scraping.



●RakeIII Large
CMT-04012
a121xb20xc67mm

[HoggerIII]

Used for digging and scooping deep inner curves.



●HoggerIII Small
CMT-02211
a40xb67xc65mm



●HoggerIII Large
CMT-02212
a68xb71xc72mm

[Triangle RakeIII]

Triangle Rakes are used for fine, intricate modeling on areas that are difficult to shape with the Chokkaki.



●Triangle RakeIII Small
CMT-07012
a38xb19xc80mm

[Double Sided RakeIII]


Used for large inner curves.



●Double Sided RakeIII
JAGGED BLADE
CMT-08011
a76xb35xc47mm

CAUTION Clay Modeling Tool

Each tool is delivered not fully whetted with the intention that customers will whet the blade to their preference. It is also a safety precaution. If the blade arrives with deficiency, we will offer a replacement.

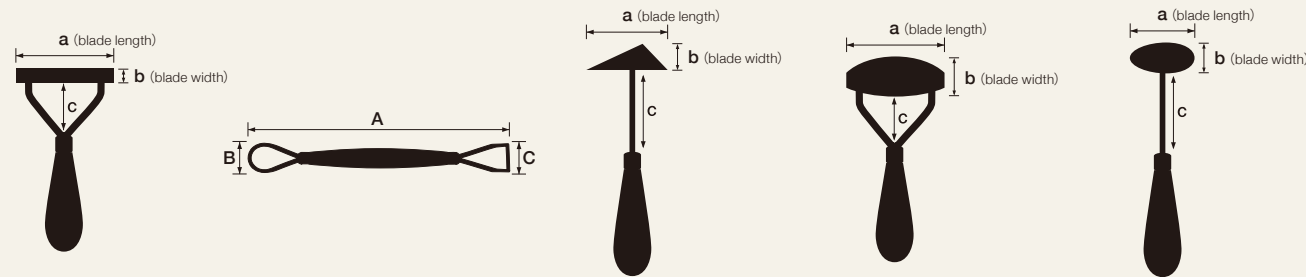

Clay Modeling Tools Ⅲ Series

Made in China

Limited Stock

Clay Modeling Tool Ⅲ Series will be discontinued once current stock runs out due to specification changes. Please check availability before ordering.

[Trapezoid RakeⅢ]

After shaping with the Chokkaki, use the Trapezoid Rake Ⅲ to finish a perfectly smooth surface.



●Trapezoid RakeⅢ Small
CMT-03011
a32xb10xc52mm




●Trapezoid RakeⅢ Medium
CMT-03012
a50xb12xc52mm



●Trapezoid RakeⅢ Large
CMT-03013
a69xb17xc56mm

CAUTION Clay Modeling Tool

Each tool is delivered not fully whetted with the intention that customers will whet the blade to their preference. It is also a safety precaution. If the blade arrives with deficiency, we will offer a replacement.

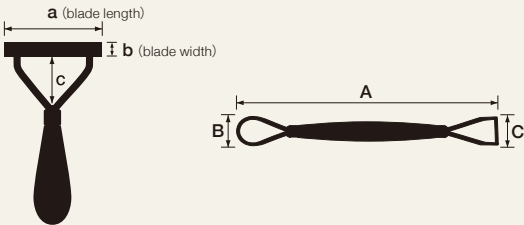

[WireⅢ]

Wire is used for scraping concave surfaces or making detailed parts. Available in various shapes and sizes.



●WireⅢ 4mm CMT-11011 A185×B4×C4mm



●WireⅢ 6mm CMT-11012 A185×B6×C6mm



●WireⅢ 8mm CMT-11013 A185×B8×C8mm



●WireⅢ 12mm CMT-11014 A210×B14×C14mm




●WireⅢ 16mm CMT-11015 A210×B17×C17mm



●WireⅢ 24mm CMT-11016 A217×B25×C25mm

Electroplated Diamond Sheet

Used for sharpening clay modeling tool blades and for polishing tools and related items. The back of the sheet is adhesive, which means you can freely stick it to a surface of your choice. Offered in 4 different grits. The lower the # value, the rougher the grit.

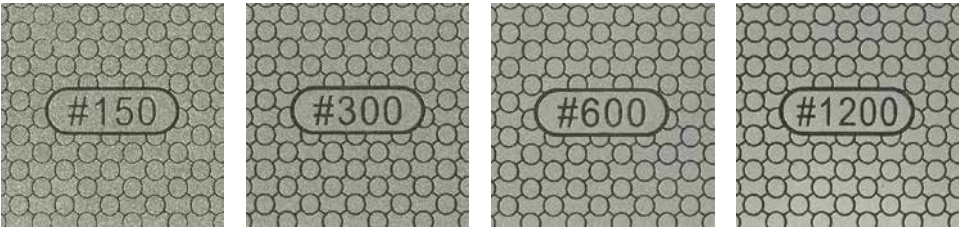

Sheet Size

- 50mm×300mm
- 50mm×100mm

Cut to a convenient size



Flexible abrasive sheet can be cut to any size for convenient use.

Adhesive backing



Adhesive backing allows for easy attachment to various surfaces.

Example of how to use



Stick the sheet onto your workbench and sharpen the tip of your modeling tool.

Diamond Whetstone [iWood series]

This whetstone is used for rough whetting tools or steel. Since it has a thin layer of diamond on its surface, tools can be whetted easily. When it becomes difficult to whet, please inquire about replacement whetstones.



●#150 Extra Coarse
205×70×8mm



●#300 Coarse
205×70×8mm




●#800 Fine
205×70×8mm



●Base for iWood Series

Basic shaving process

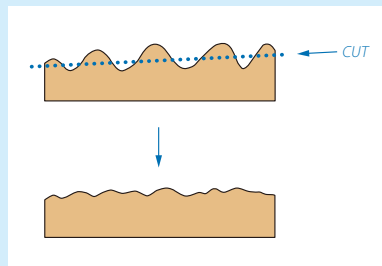


* 2. Use the saw edged end.

1. Shaving.


With the use of the blade face, scrape the large rugged surface of the clay to achieve an overall smoothness.

2. Rough shaving.


With the use of the saw edged end of the rake the basic shape should be formed. It is advisable to move the rake in random directions in order to achieve the best result.




* 3. A




* 3. A



* 3. B



* 3. B



* 3. C

3. Steps for rough shaving.

A: A large area can be shaved off by setting the rake at a 90° angle against the pulling direction. This is favorable during the early stage of surface treatment.

B: A steady sway of the rake can be achieved by inclining the rake to tilt against the direction of the pull. At the same time a more increased slanted shave becomes possible.

C: More steady shaving can be achieved by pulling the rake to draw a curved line and inclining it into a tilt. This will, however, decrease the amount being shaved, but the condition of the surface will improve.

4. The mid-finish process.

The use of a finisher will produce a much smoother surface. At this stage the surface should be prepped for actual modeling. To mid-finish the model, lightly shave the surface with a well sharpened blade.

Effective ways to handle the tool during this process:

A: Grip the tool gently and lightly shave the surface.

B: Maneuver the tools in random directions.

NB: The surface of the clay will end up with wavy lines if the surface finishing process is carried out too swiftly while the surface is still rough.

How to Sharpen the Clay Modeling Tools



* Prepare sandpaper beforehand.

1. Rough Sharpening


Sharpen the blade using #240 grit (very fine) sandpaper, handling the blade so that it is positioned in a 45° angle. Sharpen the blade by dragging it in this position up and down.

2. Medium Sharpening

Next, sharpen the blade using #600 grit (super fine) sandpaper. With oil, sharpen in the same 45° angle as above.

3. Finishing Sharpening

Using oil, finish the blade with #1000 grit (ultra fine) sandpaper. To be considered properly sharpened, it is necessary to finish the blade using #1000 grit sandpaper.

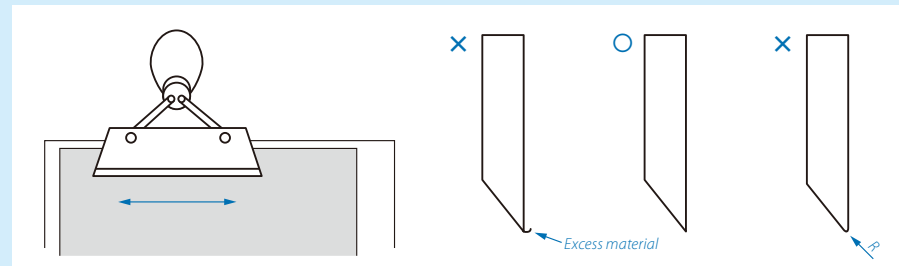

4. Back-end Sharpening

If using #600 grit sandpaper, sharpen

* Without sharpening the backside of the blade, the blade is unfinished and will not cut with optimum precision.

* Sharpening the backside more than twice will result in an R—making the edge blunt.



5. Edge Sharpening


Rubbing the edge lightly just once against the surface of superfine sandpaper will result in a mirror-like finish. This is the most recommended finish for blades.

Testing the sharpness of the blade—as pictured on the left, can be done by placing a thumb against the sharp edge of the blade and flicking towards oneself.

* Only flick upwards, dragging the finger sideways will result in injuries.

Steel Made in Japan

Steel is an essential tool for the final finish of your clay model. These flexible steel sheets are designed to fit the curvature of your clay surface to achieve a smooth and flawless finish. Sizes are available from 150mm to 300mm.

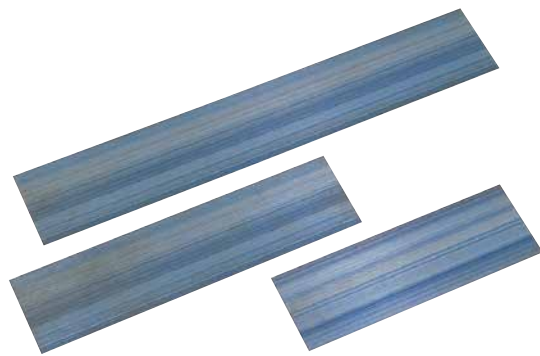

●Steel #1501	<i>CMT-17001</i>	t0.1mm	a150×b50mm
●Steel #1515	<i>CMT-17002</i>	t0.15mm	a150×b50mm
●Steel #1525	<i>CMT-17003</i>	t0.25mm	a150×b50mm
●Steel #1504	<i>CMT-17004</i>	t0.4mm	a150×b50mm
●Steel #2015	<i>CMT-18001</i>	t0.15mm	a200×b50mm
●Steel #2025	<i>CMT-18002</i>	t0.25mm	a200×b50mm
●Steel #2004	<i>CMT-18003</i>	t0.4mm	a200×b50mm
●Steel #3004	<i>CMT-19001</i>	t0.4mm	a300×b50mm


*t: thickness

Made in
Japan
Quality




Shape your own Steel

The blade tip is finished at
a 90° angle.

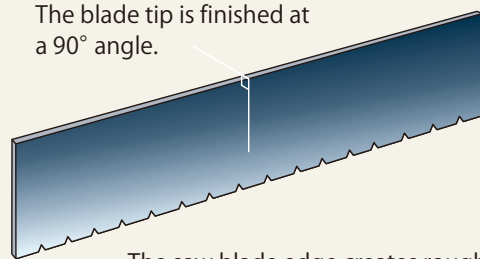

The saw blade edge creates rough surfaces,
which scrapes efficiently and quickly.

90° angle.

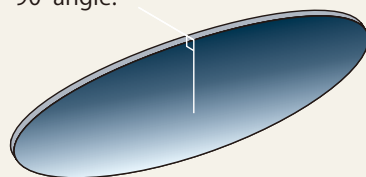

The shape and thickness can be
adjusted to your needs.

QSK 5 Steel Made in Japan

Our high quality QSK 5 Steel plates can be used for multiple purposes. QSK 5 Steel can be cut into small pieces and can be made into ellipse shapes or any other custom shapes. QSK 5 can be used as guidelines on 1/1 full-scale clay models due to its long length and hard quality. Various sizes are available. QSK 5 steel is a special steel strip (SK Steel) that is processed via quenching.

※Delivery time takes approximately 1 month
as this product is a made-to-order product.

102mm Width Series

●t0.15mm	a1000×b102mm
●t0.15mm	a600×b102mm
●t0.2mm	a1000×b102mm
●t0.2mm	a600×b102mm
●t0.3mm	a1000×b102mm
●t0.3mm	a600×b102mm
●t0.4mm	a1000×b102mm
●t0.4mm	a600×b102mm
●t0.5mm	a1000×b102mm
●t0.5mm	a600×b102mm
●t0.6mm	a1000×b102mm
●t0.6mm	a600×b102mm
●t0.7mm	a1000×b102mm
●t0.7mm	a600×b102mm
●t0.8mm	a1000×b102mm
●t0.8mm	a600×b102mm
●t0.9mm	a1000×b102mm
●t0.9mm	a600×b102mm
●t1.0mm	a1000×b102mm
●t1.0mm	a600×b102mm


*t: thickness

75mm Width Series

●t0.3mm	a1000×b75mm
●t0.3mm	a600×b75mm
●t0.5mm	a1000×b75mm
●t0.5mm	a600×b75mm

*t: thickness

Made in
Japan
Quality



Mendasu

Laminated Glass Resin material

Mendasu is used for rough surface scraping. Unlike carbon and steel, the Mendasu has adequate flexibility and hardness, for easy scraping even on delicate surfaces.


※There may be errors of ± 10% thickness against the notation.

※Custom sizes are available.

Please feel free to contact us for the minimum order quantity, sizes and price.

●t0.2mm	1,000×1,000mm
●t0.3mm	1,000×1,000mm
●t0.4mm	1,000×1,000mm
●t0.5mm	1,000×1,000mm
●t0.6mm	1,000×1,000mm
●t0.8mm	1,000×1,000mm
●t1.0mm	1,000×1,000mm
●t1.6mm	1,000×1,000mm
●t2.0mm	1,000×1,000mm
●t3.0mm	1,000×1,000mm
●t4.0mm	1,000×1,000mm


*t: thickness

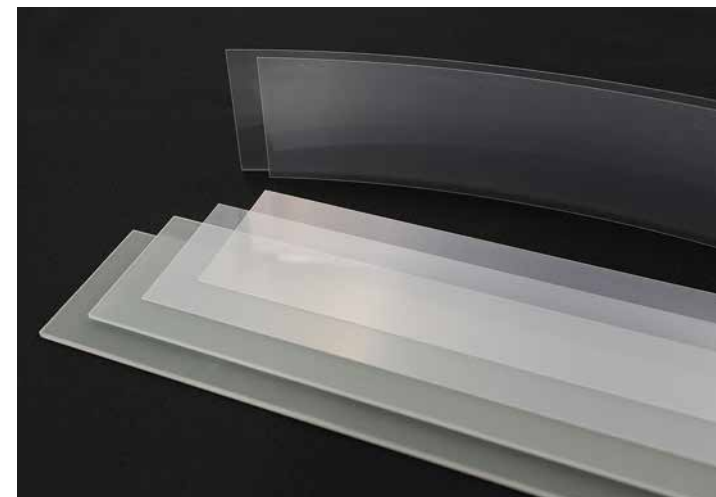

SP Mentori

Made in Japan

The SP Mentori extracts scraped clay, which transfers through the outward shaped holes designed to avoid clogging. The SP Mentori is finished with a special hardener and is rust resistant.

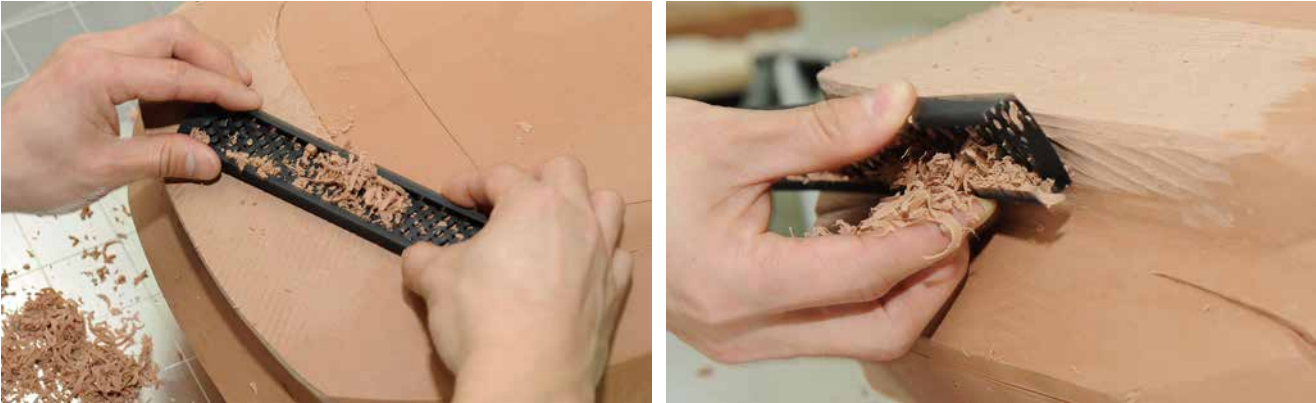

●SP Mentori Fine Mesh 100mm
MTSP-030005
100mm×34mm×14mm 28g

●SP Mentori Fine Mesh 200mm
MTSP-030004
200mm×34mm×14mm 56g



The SP Mentori



TOOLS INT’L Corp

Original Tools

Made in Japan Quality

●SP Mentori Coarse Mesh 100mm
MTSP-030003
100mm×34mm×14mm 28g

●SP Mentori Coarse Mesh 200mm
MTSP-030002
200mm×34mm×10mm 53g

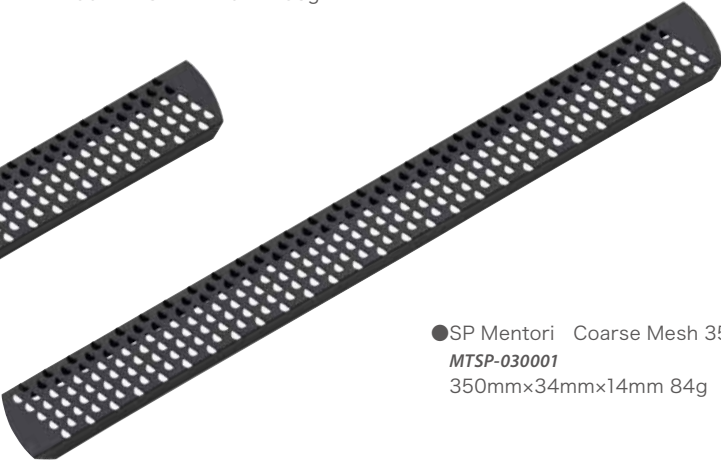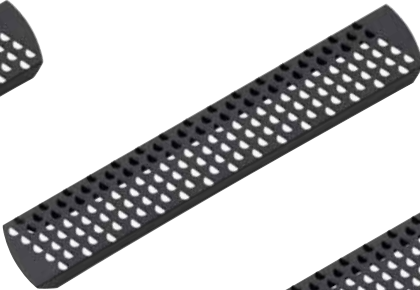

●SP Mentori Coarse Mesh 350mm
MTSP-030001
350mm×34mm×14mm 84g


Mentori

Made in Japan

Scraped debris extracts smoothly through Mentori meshes, so the Mentori is not easily clogged. Processed with a special hardening finish and rust resistance.



●Mentori Pocket 200 MT-200 Coarse Mesh
200mm×35mm×10mm 50g

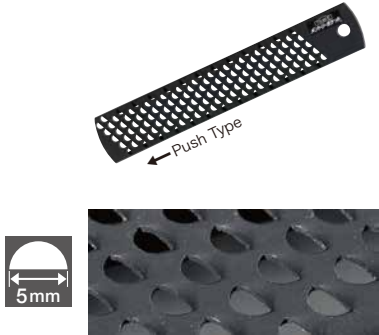

Tajima ARAKAN

Tajima ARAKAN are used for tidying up planes and surface edges. These are planes for scraping off clay, used in the stage before steel sheets. They are not suitable for large surfaces.



●AK-POKT
W41mm×H50mm
D140mm



●AK-STKH
W20mm×H40mm
D250mm



●AK-STDH
W42mm×H62mm
D160mm



●AK-STDR
W42mm×H68mm
D160mm

STABA Former Gauge

Former Gauge is used for replicating sectional shapes, such as for bodies and bumpers. They come in handy when you want to copy the form of the left side for use on the right side.



●2pcs/set 200mm×2




●5pcs/set 200mm×5



Template Resin Board

Special Resin Board to make templates for line drawings of models. Also usable for scraping clay surfaces.

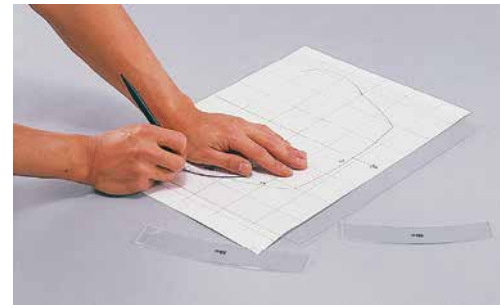

●t0.5mm 650×725mm
●t1.0mm 650×725mm
*t:thickness



CLAY MODELING FILM

New Product

Silver **WIDE**
W1,200mm×L30m/roll

Features of Clay Modeling Film

Specifically designed for industrial clay models, Clay Modeling Film is directly applied to the clay surface and used to check highlights on the surface of the model. Using our film allows modelers to create models that closely resemble the final product. Our modeling film is a better alternative to paint, as it can be easily applied directly to the model and can be removed with ease. Clay modeling film is notable for its high tolerance to stretch. Our film can be easily and beautifully stretched when applied to the model. This ensures that even detailed parts of the model can be checked and quickly modified. Additionally, because we use a water-based glue for our film, our films are easily adjustable.

*As for Clear Clay Modeling Film, unlike our colored Clay Modeling Films, paint (organic solvent) should be applied beforehand.

Use of Clay Modeling Film

- For modeling and fitting on industrial clay.
- For modeling and fitting on resin models.
- For other applicable modeling and fitting.



Example for use of
Clay Modeling Film **Clear**
*Yellow paint applied on Clear film.



Example for use of
Clay Modeling Film **Silver**



Example for use of
Clay Modeling Film **Red**



Example for use of
Clay Modeling Film **Black Metallic**

■ Clay Modeling Film Clear

This is our transparent film. Paint the surface of the film with lacquer paint. Applying the paint causes the film to soften, then the film is ready to be soaked in water. Gently peel off the paper backing and apply the film to the surface of the clay model.

■ Colored Film

Colored film is frequently used in production. Painting the surface of this film is not necessary, as it is ready to be used as is. After soaking the film in water and peeling off the paper backing, apply the film to the clay surface.

If the surface of the clay is sprayed with water beforehand, the film can be easily applied and adjusted. You can gently remove air bubbles and excess moisture with a rubber spatula or squeegee. For a beautiful finish, wipe excess moisture away with a cloth.

CAUTION Please do not store under high temperatures or humidity.

■ Metallic These films provide a metallic finish, ideal for highlight checking and surface evaluation.




■ **Non-Metallic** These films come in a variety of finishes, including matte, gloss, and clear for painting.




How to use Clay Modeling Film

■ How to set up the color type

Peel off the clear protective film (clear polyethylene terephthalate (PET) resin) from the surface of the film. Then soak the entire piece of film in tepid water. The paper backing of the film will be loosened enough to remove. After gently removing the paper backing, you should be left with clean, bare film. To apply the film to the clay, please first dampen the surface of the clay by spraying the model with water. This helps to make application and adjustment easier to achieve a smooth, finished surface. Scrape the surface of the film with a rubber spatula or squeegee to remove water and air bubbles from beneath the film. Finally, wipe away excess water with a cloth.

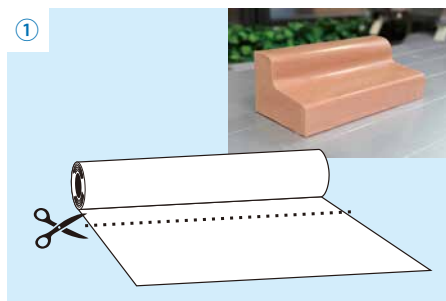

Cut the modeling film slightly larger than the clay model.

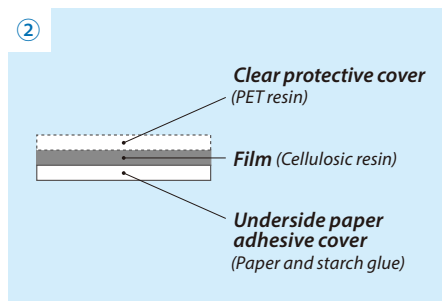

Our Clay Modeling Film has a clear protective film, the colored film itself, and the paper backing. Both the protective film and the paper backing must be removed before application.



The protective film (clear PET resin) is first removed before use.



Soak the remaining colored film with the colored-side down in a tray of tepid water.



Having the paper face up makes it easy to confirm that the film is thoroughly soaked.



Completely submerge the film in water, applying gentle pressure to keep it beneath the surface of the water.



After soaking for a few minutes, the paper backing should peel off effortlessly from the film.



Lifting along the edges of the film, turn the film over.




Moisten the surface of the clay by wetting it with water, then carefully apply the film to the model.



Adjust the film with a spatula to release water and air bubbles that appear on the surface, being careful to smooth corners. Finish by wiping away excess water with a cloth.



Cut excess film from the edges carefully while the model is still moist. When the film dries, it adheres to the surface of the clay with a paste. Once the film has dried, it becomes difficult to cut.

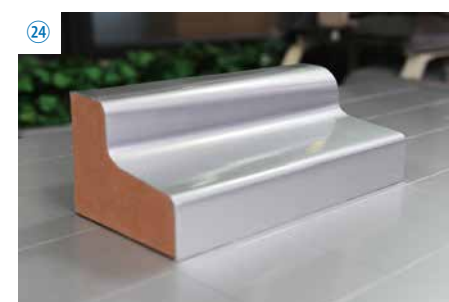

Finely finish the edges of the film with a spatula.

How to Use Clay Modeling Film


Follow the instruction manual for correct usage of Clay Modeling Film

Only cut the film immediately before use.

Once film is cut, air pockets can occur between the film and clear protective layer, which can result in discoloration and deformation.

Cut the film in straight lines.

Cut the film in a straight line along the entire width of the role, then cut into necessary sizes. This is to prevent air from entering the film.

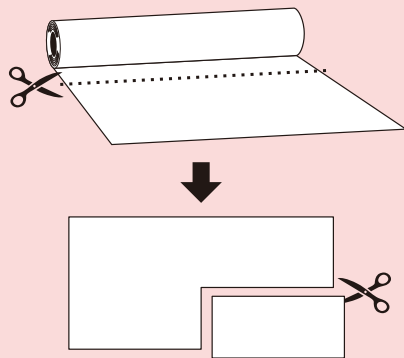


Remove the clear protective layer immediately after cutting the film.

Air can easily enter between the film and clear protective layer, which may cause discoloration and deformation.

Roll the remaining unused sheet of film tightly and securely after use.


To avoid air entering the film, we recommend rolling the remaining film back tightly and firmly, securing with crepe tape on either end of the film. Then wrap in a plastic bag and store it back in the box.



Clay modeling Film is considered to be a delicate product. Your understanding and cooperation on proper usage is appreciated.

Components of Clay Modeling Film

1: Clay Modeling Film is composed of three layers.



※ When disposing of above materials, please accord to relevant laws of local governments as required.

2: The materials used for packaging:

- Cardboard and inner tube----paper
- Pipe Holder----Plastic (PP)

※ For handling of used water when peeling film, this water can be drained directly into sewers.

FAQ for Clay Modeling Film



1. Is Clay Modeling Film adhesive?

- Yes, our films are backed with a thin layer of water-based adhesive.

2. What is Clay Modeling Film used for?

- Our film is specifically used for checking highlights on clay models, qualification studies and presentation models.

3. How should Clay Modeling Film be stored?

- Our film should be stored in cool places with low humidity, out of direct sunlight. Long-term exposure to humidity and direct sunlight may result in shrinkage and discoloration.

4. Is a “trial” necessary?

- No, but we recommend doing so before the actual fitting. That way, you can get a better feel for how our product is used.

5. What tools are necessary for Clay Modeling Films?

- The basic tools you need are cutting tools, such as scissors, to cut the film. Additionally, you need a receptacle or a vat to soak the film in, a water sprayer, a rubber or plastic spatula to remove water and air bubbles beneath the film, and towels or paper towels to wipe the surface.

6. Does “Clear” Clay Modeling Film need to be painted prior to use?

- Yes. Please be sure to apply lacquer paint on the surface of the film. Without pre-painting, the “Clear” film does not stretch at all. It becomes elastic with the application of an organic solvent.

7. How long should the film be soaked in water?

- The soaking time of film will vary depending on the size of the film and the environment. The film is ready to be used when the paper backing can smoothly be removed from the film.

8. Should the water used for soaking the film be changed often?

- Yes. Using the same water to soak film multiple times may cause discoloration on the film, as the glue left in the water can adhere to the surface. Therefore, we recommend changing the water often.

9. What is the scale printed on the underside of the paper backing? How is it used?

- Thin Line: 100mm plotting (50mm scale mark).
- Thick Line: 500mm plotting.
- The scale mark is helpful for cutting the film. In addition, it is easy to see and adjust the direction of the film before adhering the film to the clay surface.

10. Is the water used for soaking the film harmful?

- No. It is only water mixed with starch glue. The water can be disposed of normally.

11. Can Clay Modeling Film be reused?


- We do not recommend doing so. After initial use of our film, most of the adhesive is lost, so it is not ideal for multiple uses.

CAUTION Please do not store under high temperatures or humidity.

Printable Flex Sheet

A transparent sticker-type film


New Product

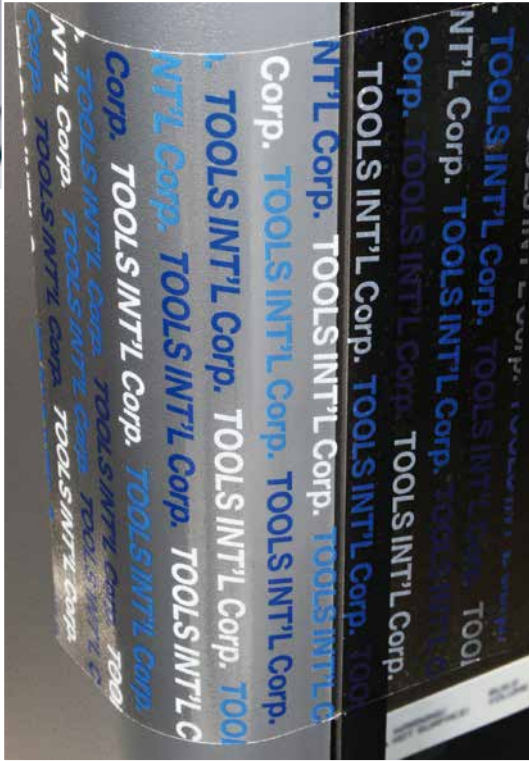

Solvent printer output example

- High Compatibility : Printable with industrial UV and solvent printers.
- Versatile Application : Ideal for both hard and clay models, perfect for interior component design.
- Superior Flexibility : Sticker-type film that stretches smoothly without applying heat.

- PFS-00002 W600mm×L20m/roll
- PFS-00003 W1,200mm×L20m/roll

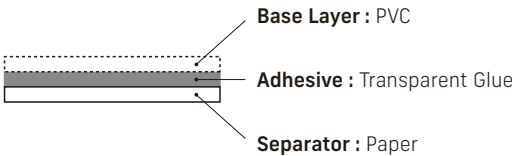

Application example on a curved resin model (right: clear glass effect), printed with a solvent printer.

UV printers allow multi-layer printing to replicate textures such as carbon fiber.
*Note : Increasing the number of print layers reduces the film's flexibility.

UV printer output example


Precautions Before Use

Please check printer compatibility before purchasing or using.
Compatibility may vary depending on ink type and core size.

Dimensions : (Available in two different widths)
600mm width / 1,200mm width Length : 20m
Core Inner Diameter : 76.2mm

Modeling Check Foil

Aluminum Foil for Highlight Checking & Model Mock-up.
Our foil is used to check clay model surfaces. They can also be used to fit simple parts.

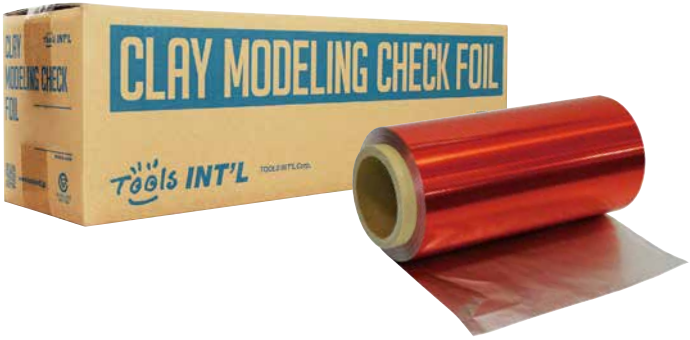

Chrome Silver
/ Silver
MCF-11002
W450mm×L250m/roll



Steel Gray
/ Chrome Silver
MCF-11004
W450mm×L250m/roll



Gloss Black
/ Silver
MCF-11006
W450mm×L250m/roll



Red
/ Silver
MCF-11001
W200mm×L250m/roll



Matte Black
/ Silver
MCF-11003
W450mm×L250m/roll



Gloss White
/ Silver
MCF-11005
W450mm×L250m/roll



Dark Gray
/ Silver
MCF-11007
W450mm×L250m/roll

CAUTION Swatched colors may appear different from the actual product.

Modeling Sheet Chrome Silver

Used for modeling chrome parts such as door handles, headlight housing, and console parts.

Modeling Sheet can be stretched ultra-thin and maintain its high gloss and chrome quality.



●5M **MSC-14001** W540mm×L5m/roll




Example of use: Modeling Sheet Chrome Silver can be used on ABS plastic resin door models. The Modeling Sheet Chrome Silver is highly flexible to be applied to three-dimensional curved surfaces.

CAUTION Please do not store under high temperatures or humidity.

PVC Color Film #3008 (Smoke)

Transparent tint vinyl sheet without adhesive. Used for window glass fitting on automotive clay models. NOT suitable for free curves.

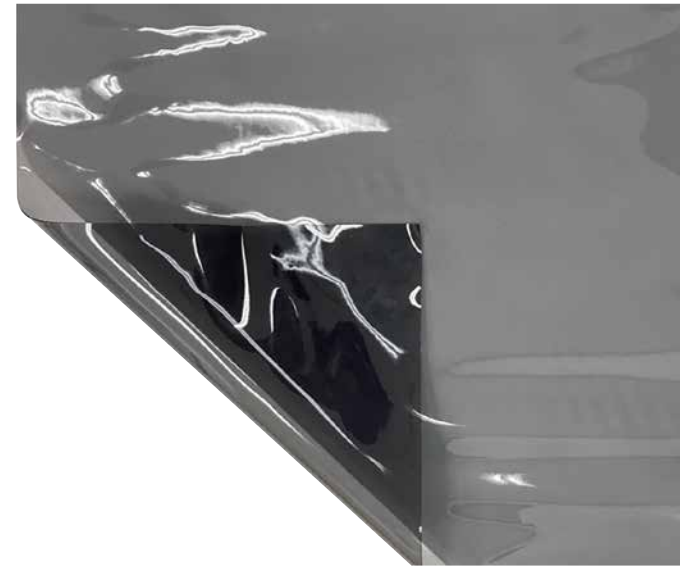

●PVC Color Film #3008 Smoke t0.3mm W915mm×50m/roll
*t: thickness

Felt Spatula

The Felt Spatula is used to apply Clay Modeling Film onto clay models. The Felt Spatula can be cut into small pieces and custom made into ellipse shapes or any other desired shapes.



Hot Air Gun HAG-1551

Resistant Temperature: 50-550°C
Used for heating adhesives, drying paint, heat holding of acrylic/vinyl chloride boards or resin pipes. DO NOT USE on inflammable materials.



●HAG-1551 L255mm×W82mm×H205mm



[Soft type] Natural fiber
125×90mm 12 sheets/set

●t5mm

●t10mm

*t: thickness


Modeling Film Spatula

●SH type 100×80mm



Rubber Spatula

Rubber Spatula used for applying Clay Modeling Film to clay models.

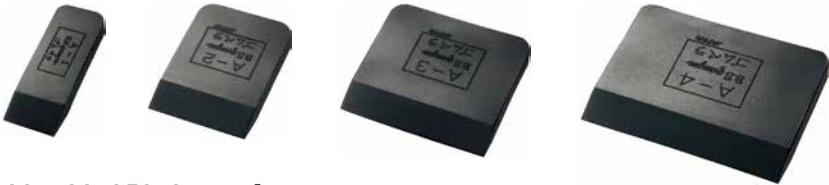

[Double-sided Blade Type]

●A-1 W25×L73mm ●A-2 W50×L67mm ●A-3 W75×L67mm ●A-4 W100×L73mm



[Single-edge Type Blade]

●B-1 W50×L59mm



[Right Angle & Irregular R]

●C Type W70×L100mm One side blade

Resin Spatula 3 piece set / Yellow

3-piece Resin Spatula for applying Clay Modeling Film onto a clay model. Stiffer than the Rubber Spatula.



[3 pieces set]

●S W66×L108mm



●M W100×L68mm



●L W127×L74mm



Ellipse Shaped Rubber Spatula


Ellipse Shaped Rubber Spatula can be used to smooth clay model surfaces.



●2254-539 Soft type t4mm×75mm
*t:thickness



●2254-540 Hard type t4mm×75mm
*t:thickness

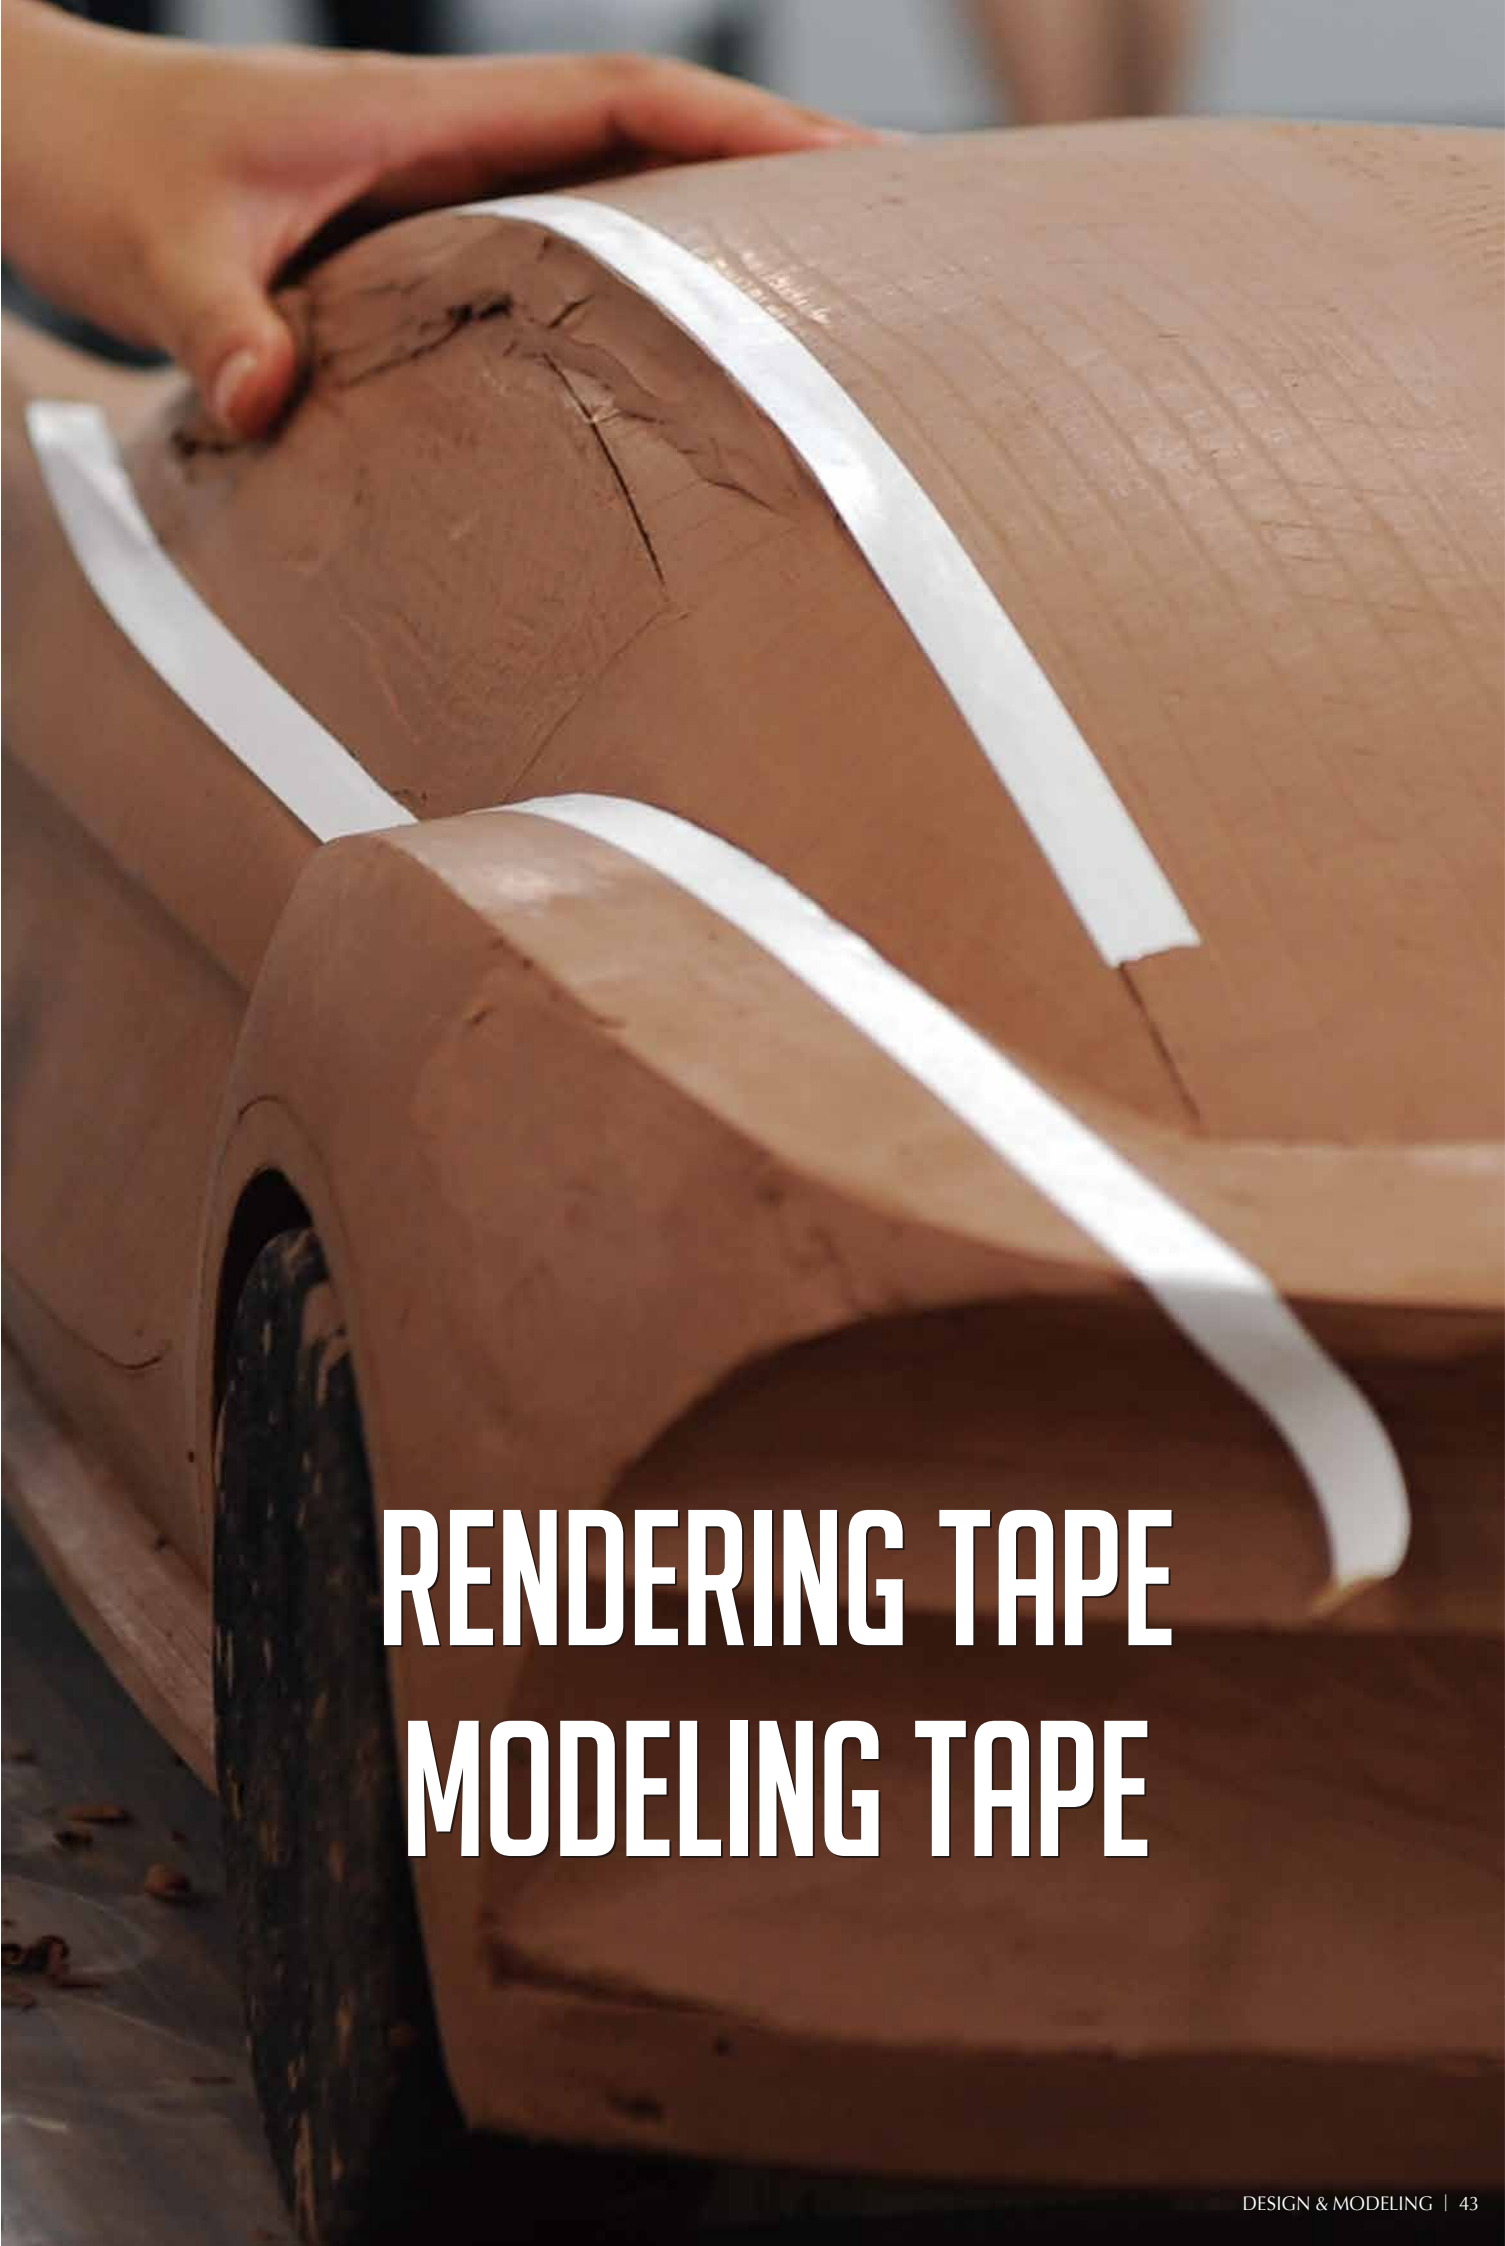

RENDERING TAPE
MODELING TAPE

Rendering Tape / Modeling Tape

IC Free Tape

Free curve tape made from crepe paper. Because of its gentle adhesion, this tape can be easily reapplied. 16m/roll with case (plastic case) and without case (packed in a paper box)

7 Available Colors
(Black, Red, Blue, Yellow, White, Gray, and Light Green)

With case *IC Tapes w/Case are available in units of **10rolls/set**.



Length 16m							
Width	Black	Red	Blue	Yellow	White	Gray	Light Green
0.4mm	●						
0.5mm	●	●	●	●	○	●	●
0.6mm	●						
0.7mm	●						
0.8mm	●						
1.0mm	●	●	●	●	○	●	●
1.2mm	●						
1.5mm	●						
1.6mm	●						
2.0mm	●	●	●	●	○	●	●
2.5mm	●						
3.0mm	●	●	●	●	○	●	●
4.0mm	●	●	●	●	○	●	●
5.0mm	●	●	●	●	○	●	●

Without case							
	Black	Red	Blue	Yellow	White	Gray	Light Green
	●	●	●	●	○	●	●
Width				Width			
0.3mm				7.0mm			
0.4mm				8.0mm			
0.5mm				9.0mm			
1.0mm				10.0mm			
1.5mm				11.0mm			
2.0mm				12.0mm			
2.5mm				15.0mm			
3.0mm				19.0mm			
3.5mm				20.0mm			
4.0mm				25.0mm			
4.5mm				30.0mm			
5.0mm				50.0mm			
6.0mm							

IC Matte Tape

IC Matte Tape is for creating straight lines. Reflective (Gold/Silver) line tape with adhesion. 8m length.

7 Available Colors
(Black, Deep Blue, Yellow, Moss Green, White, Silver, and Gold)

With case *IC Tapes w/Case are available in units of **10rolls/set**.



Length 8m							
Width	Black	Deep Blue	Yellow	Moss Green	White	Silver	Gold
0.5mm	●	●	●	●	○	●	●
1.0mm	●	●	●	●	○	●	●
2.0mm	●	●	●	●	○	●	●
3.0mm	●	●	●	●	○	●	●
4.0mm	●	●	●	●	○	●	●
5.0mm	●	●	●	●	○	●	●

Without case *All colors of IC Tapes without Case are available in units of **20rolls/set**.

0.5mm/1.0mm/2.0mm/3.0mm/4.0mm
5.0mm/6.0mm/8.0mm/10.0mm/12.0mm



KAMOI mt Matte Black

The mt Matte Black Tapes are made from *washi* paper (Japanese paper). It simulates matte black paint on clay models. The paper-thin nature of this tape makes for a seamless boundary.



Length 7m		Length 7m	
mt basic		mt slim	
Width	Unit	Width	Unit
50mm	1 roll	3mm	3 rolls
100mm	1 roll	6mm	3 rolls

Length 50m		Length 50m	
mt foto		mt foto	
Width	Unit	Width	Unit
25mm	1 roll	50mm	1 roll
38mm	1 roll		

KAMOI Washi Tape No. 220 Series

Tape made from *washi* paper (Japanese paper). Useful for plotting key line drawings or shape adjustments while modeling.



Length 18m		Length 18m	
Width	Unit	Width	Unit
6mm	200 rolls	21mm	60 rolls
7mm	170 rolls	22mm	50 rolls
8mm	150 rolls	23mm	50 rolls
9mm	120 rolls	24mm	50 rolls
10mm	120 rolls	25mm	50 rolls
11mm	110 rolls	26mm	40 rolls
12mm	100 rolls	27mm	40 rolls
13mm	90 rolls	28mm	40 rolls
14mm	80 rolls	29mm	40 rolls
15mm	80 rolls	30mm	40 rolls
16mm	80 rolls	40mm	30 rolls
17mm	70 rolls	45mm	20 rolls
18mm	70 rolls	50mm	20 rolls
19mm	60 rolls	100mm	10 rolls
20mm	60 rolls		

CAUTION Please do not store under high temperatures or humidity.


Length 15m		Length 15m	
Width	Unit	Width	Unit
2mm	46 rolls	6mm	160 rolls
3mm	30 rolls	8mm	120 rolls
4mm	23 rolls	9mm	120 rolls
5mm	18 rolls	10mm	96 rolls
6mm	16 rolls	12mm	80 rolls
7mm	14 rolls	15mm	64 rolls
8mm	12 rolls	18mm	56 rolls
10mm	9 rolls	20mm	48 rolls
		24mm	40 rolls
		25mm	40 rolls
		30mm	32 rolls
		40mm	24 rolls
		50mm	16 rolls
		100mm	8 rolls

KAMOI mt Tape

Washi paper (Japanese paper) tape. We have expanded our selection to include even more great colors and sizes.

Length 7m		Length 7m	
Width	Unit	Width	Unit
2mm	46 rolls	6mm	16 rolls
3mm	30 rolls	7mm	14 rolls
4mm	23 rolls	8mm	12 rolls
5mm	18 rolls	9mm	11 rolls
6mm	16 rolls	10mm	9 rolls

5 Available colors
(Shocking Pink, Silver, Cork, Red, and Matte White)



KAMOI Silver & Chocolate Tape

Washi paper (Japanese paper) tape.

Length 15m		Length 15m	
Width	Unit	Width	Unit
6mm	160 rolls	24mm	40 rolls
10mm	96 rolls	25mm	40 rolls
12mm	80 rolls	30mm	32 rolls
15mm	64 rolls	40mm	24 rolls
18mm	56 rolls	50mm	16 rolls
20mm	48 rolls	100mm	8 rolls

*Please feel free to contact us for the minimum order quantity, sizes and price.

RINREI Washi Tape No.136

Washi paper (Japanese paper) tape.
Useful for plotting key line drawings or shape adjustments
while modeling.



Length 18m	
Width	Unit
12mm	100 rolls
15mm	80 rolls
18mm	70 rolls
24mm	50 rolls
30mm	40 rolls
40mm	30 rolls
50mm	20 rolls

RINREI Washi Tape No.138

Washi paper (Japanese paper) tape.
Useful for plotting key line drawings or shape adjustments
while modeling.



Length 18m	
Width	Unit
12mm	100 rolls
15mm	80 rolls
18mm	70 rolls
24mm	50 rolls
30mm	40 rolls
40mm	30 rolls
50mm	20 rolls

RINREI Washi Tape No.140

Washi paper (Japanese paper) tape.
Useful for plotting key line drawings or shape adjustments while modeling.
10 Available Colors (White, Black, Red, Blue, Yellow, Green, Orange, Light Green, Sky Blue, Pink)

Length 18m		Length 18m	
Width	Unit	Width	Unit
3mm	400 rolls	15mm	80 rolls
4mm	300 rolls	18mm	70 rolls
5mm	240 rolls	20mm	60 rolls
6mm	200 rolls	24mm	50 rolls
7mm	150 rolls	25mm	40 rolls
8mm	150 rolls	30mm	40 rolls
9mm	130 rolls	40mm	30 rolls
10mm	120 rolls	50mm	20 rolls
12mm	100 rolls		

*Please feel free to contact us for the minimum order quantity, sizes and price.

Nichiban Masking Tape No. 222

Masking tape based on *Washi* paper (Japanese paper) tape.
Can be used for cutting guidelines on clay models.



Length 18m	
Width	Unit
12mm	100 rolls
15mm	80 rolls
18mm	70 rolls
20mm	60 rolls
24mm	50 rolls
30mm	40 rolls
40mm	30 rolls
50mm	20 rolls

Nichiban Masking Tape No. 2311

Masking tape based on *Washi* paper (Japanese paper) tape.
Can be used for cutting guidelines on clay models.



Length 18m	
Width	Unit
9mm	120 rolls
12mm	100 rolls
15mm	80 rolls
18mm	70 rolls
20mm	60 rolls
24mm	50 rolls
30mm	40 rolls
40mm	30 rolls
50mm	20 rolls

Nichiban Masking Tape No. 2312

Masking tape based on *Washi* paper (Japanese paper) tape.
Can be used for cutting guidelines on clay models.



Length 18m	
Width	Unit
9mm	120 rolls
12mm	100 rolls
15mm	80 rolls
18mm	70 rolls
20mm	60 rolls
24mm	50 rolls
30mm	40 rolls
40mm	30 rolls
50mm	20 rolls

3M Masking Tape 243J Plus

Masking tape based on *Washi* paper (Japanese paper) tape.
Can be used for cutting guidelines on clay models.



3M Masking Tape 343

Masking tape based on *Washi* paper (Japanese paper) tape.
Can be used for cutting guidelines on clay models.



3M Fine Line Tape 218

Used for complicated masking parts
and stripes.
Suitable to be applied on paint.
Heat resistant.



*Please feel free to contact us for the minimum
order quantity, sizes and price.

CAUTION Please do not store under high temperatures or humidity.

Length 18m

Width	Unit
6mm	200 rolls
9mm	120 rolls
10mm	120 rolls
12mm	100 rolls
15mm	80 rolls
18mm	70 rolls
20mm	60 rolls
24mm	50 rolls
30mm	40 rolls
36mm	30 rolls
40mm	30 rolls
50mm	20 rolls
60mm	20 rolls

Length 18m

Width	Unit
6mm	200 rolls
9mm	120 rolls
10mm	120 rolls
12mm	100 rolls
15mm	80 rolls
18mm	70 rolls
20mm	60 rolls
24mm	50 rolls
30mm	40 rolls
36mm	30 rolls
40mm	30 rolls
50mm	20 rolls
60mm	20 rolls

Length 54.8m

	Width	Unit
#6306	1.6mm	1 roll
#6300	3.2mm	1 roll
#6301	6.4mm	1 roll
#6303	12.7mm	1 roll

3M Rendering Tape 217J

A semi-matte black crepe paper tape.
Flexible and easy to apply to curve shapes.
Base material and adhesive are slightly stronger than other crepe tapes.




Example for use of 3M Rendering Tape.

Nitto Vinyl Tape SPV-202R for model checking

Suitable for shape or highlight checking on clay models,
hard models and metal molds.



*Please feel free to contact us for the minimum
order quantity, sizes and price.

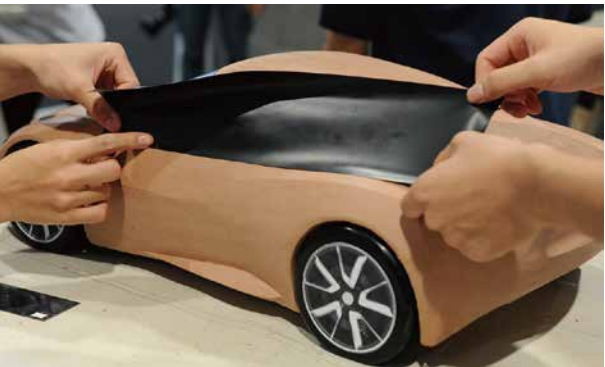

Example for use of Nitto Vinyl Tape.

CAUTION Please do not store under high temperatures or humidity.

Length 25m

Width	Unit
3mm	1 roll

Length 50m

Width	Unit
5mm	1 roll
7mm	1 roll
9mm	1 roll
12mm	1 roll
19mm	1 roll
25mm	1 roll
50mm	1 roll

Length 50m Special Cut Size

Width	Unit
4mm	96 rolls
6mm	65 rolls
8mm	50 rolls
10mm	40 rolls
15mm	26 rolls
20mm	20 rolls
30mm	13 rolls
40mm	10 rolls
100mm	4 rolls

Length 30m

Width	Unit
10mm	240 rolls
50mm	48 rolls
75mm	24 rolls
100mm	24 rolls
150mm	12 rolls
200mm	12 rolls
300mm	12 rolls

Freeman Sheet Wax

Sheet Wax is used primarily to simulate metal or part thickness when making metal forming dies or punches, resin transfer molds (RTM), or any two-part molds requiring a uniform part thickness.

Size 305mm×610mm (12"×24")

Thickness	Unit	Thickness	Unit
0.5mm	10 sheets	2.5mm	6 sheets
1.0mm	8 sheets	3.0mm	4 sheets
1.5mm	8 sheets	4.0mm	4 sheets
2.0mm	8 sheets	5.0mm	3 sheets



3M Abrasive Sponge

Resilient grinding material with grit.

Size 114mm×140mm 10 pcs/set

- No.5081 Medium
Grain Size #120~180
- No.5082 Fine
Grain Size #240~320
- No.5083 Super Fine
Grain Size #320~600
- No.5084 Ultra Fine
Grain Size #800~1000
- No.5085 Micro Fine
Grain Size #1200~1500



Hand Soap for Clay Use

Cream type cleanser for oil or epoxy paint.



●1.5kg



●1.5kg Refill Pack

Hand-Wash Brush

This brush can be used for removing clay shavings from fingernails and fingertips.



●W96×D96×H37mm

Kimwipe S-200 (Paper Cleaning Cloth)

Suitable to wipe microdust on delicate surfaces or precision measuring equipment.



●Size 120×215mm
1box 72pcs (200 Sheets/pcs)

Joint Spatula

Used to scrape clay scraps from studio floors and work surfaces.



- Small W100×L210mm
- Medium W160×L210mm
- Large W210×L230mm

Metal Tool with Handle

Metal spatula suitable for painting or resin kneading. Used for scraping scrap clay from floors or work surfaces.



- Type45 W45×L250mm
- Type75 W75×L295mm
- Type105 W105×L315mm
- Type120 W120×L315mm

Palm Fit Gloves

Comfortable, fit gloves to apply clay as if with bare hands. 10 pairs/set



- Medium
- Large

Antistatic Brush

Acrylic conductive fiber-made brush for preventing dust from adhering to the model.



- 150mm
- 300mm

COPIC®



copic.jp/en

COPIC Classic (214 colors)

214 available colors.

Nib is smooth for drawing and has a durable polyester tip.

G14
Apple
Green

- Single 214 colors
- Original (Empty Marker)
- 12 colors set
- Cool Gray 12 colors set
- Neutral Gray 12 colors set
- Toner Gray 12 colors set
- Warm Gray 12 colors set
- 36 colors set
- 72 colors set A
- 72 colors set B
- 72 colors set C

COPIC Sketch (358 colors)

COPIC with Super Brush and Medium Broad nibs.
Largely used in comic industries.

B23
Phthalic
Blue

- Single 358 colors
- Original (Empty Marker)
- 12 colors set
- Cool Gray 12 colors set
- Warm Gray 12 colors set
- Manga Illustrations 24 colors set
- 36 colors set
- 72 colors set A
- 72 colors set B
- 72 colors set C
- 72 colors set D
- 72 colors set E

COPIC Ciao (180 colors)

Price is set for first time users of COPIC markers.
Quality drawing and coloring feeling as COPIC Sketch.



- Single 180 colors
- 12 colors set
- 24 colors set
- 36 colors set A
- 36 colors set B
- 36 colors set C
- 36 colors set D
- 36 colors set E
- 72 colors set A
- 72 colors set B

[Spare Nib for COPIC Classic]


5 types for bold strokes and 4 types for detailed strokes
for COPIC markers.

For Bold Strokes

- Standard Broad (10 pcs/set)
- Soft Broad (10 pcs/set)
- Calligraphy 5mm (10 pcs/set)
- Round (10 pcs/set)
- Brush (3 pcs/set)

For Detailed Strokes

- Standard Fine (10 pcs/set)
- Super Fine (10 pcs/set)
- Semi Broad (10 pcs/set)
- Calligraphy 3mm (10 pcs/set)

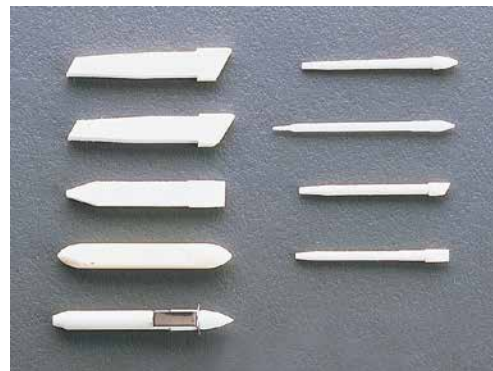

[Spare Nib for COPIC Sketch]

Spare Nib for COPIC Sketch. Install these replacement
nibs with a tweezer.

- Super Brush (3pcs/set)
- Medium Broad (10pcs/set)



COPIC OPAQUE WHITE

White for highlighting.

- 10ml
- 6ml with brush



COPIC Multiliner Plus

New

Our new Multiliner pens now feature replaceable nibs and
refillable ink. In addition, responding to customer feedback,
nib durability and color tones have been carefully refined.
With proven waterproof and alcohol-resistant performance,
these pens are well suited for illustration, manga, pen
drawing, and a wide range of creative applications.



Chic, Beautiful Colors 8 standard + 1 limited edition



Selectable Line Widths

From ultra-fine 0.03 to bold and brush tips, a versatile
range of line widths lets you choose the perfect one
for your needs.

Line Widths:

All colors: 0.03 / 0.05 / 0.1 / 0.3 / 0.5 Black only: 0.8 / 1.0 / 2.0 / 4.0 / Brush



● Black Line width (mm) 0.03/0.05/0.1/0.3/0.5/0.8/1.0/2.0/4.0/Brush



● Cool Gray Line width (mm) 0.03/0.05/ 0.1/0.3/0.5



● Warm Gray Line width (mm) 0.03/0.05/ 0.1/0.3/0.5



● Sepia Line width (mm) 0.03/0.05/ 0.1/0.3/0.5



● Brown Line width (mm) 0.03/0.05/ 0.1/0.3/0.5



● Wine Line width (mm) 0.03/0.05/ 0.1/0.3/0.5



● Cobalt Line width (mm) 0.03/0.05/ 0.1/0.3/0.5



● Forest Line width (mm) 0.03/0.05/ 0.1/0.3/0.5



● Turquoise (Limited Edition) Line width (mm) 0.03/0.05/ 0.1/0.3/0.5

COPIC acrea (24 colors)



Water-based pigment ink / Paint markers / Line width: 0.8-1.2mm *varies depending on pressure and surface

Copic acrea offers a distinctive selection of water and pigment-based paint markers with 24 opaque shades ranging from snow-white to juicy pastels and shiny metallics. The versatility unleashes endless creative possibilities since you can work on a variety of materials such as paper, glass, iron, plastic, and fabric with flat and streak-free results.

- Single 24 colors
- 6 colors set Vivid
- 6 colors set Light
- 6 colors set Deep
- 6 colors set Essentials



Vivid



Versatile



DesArt Color (36 colors)

Professional quality soft thick lead color pencils. These colored pencils are suitable for use with pastels when rendering. The colored pencil patronized by artists.

- Single 36 colors
- 12 colors set
- 24 colors set
- 36 colors set



Soft and smooth drawing feel



Colors can be layered repeatedly



Large areas can be filled in easily



Scratch technique possible with thick application

Color Chart		36 colors	24 colors	12 colors
901	Indigo Blue	●	●	
902	Ultramarine	●		
903	True Blue	●	●	●
908	Dark Green	●	●	
909	Grass Green	●	●	●
910	True Green	●	●	
912	Apple Green	●	●	●
915	Lemon Yellow	●		
916	Canary Yellow	●	●	●
918	Orange	●	●	●
919	Non-Photo Blue	●	●	
922	Poppy Red	●	●	


		36 colors	24 colors	12 colors
924	Crimson Red	●	●	●
927	Light Peach	●		
928	Blush Pink	●		
929	Pink	●	●	
930	Magenta	●	●	
932	Violet	●	●	●
933	Violet Blue	●	●	●
935	Black	●	●	●
938	White	●	●	●
939	Peach	●	●	
941	Light Umber	●		
942	Yellow Ochre	●		

		36 colors	24 colors	12 colors
945	Sienna Brown	●	●	●
948	Sepia	●	●	●
956	Lilac	●	●	
988	Marine Green	●		
989	Chartreuse	●		
992	Light Aqua	●	●	
1002	Yellowed Orange	●		
1003	Spanish Orange	●	●	
1034	Goldenrod	●	●	
1051	Warm Grey 20%	●		
1054	Warm Grey 50%	●		
1061	Cool Grey 30%	●		

PM Pad White 50 sheets/book

The PM Pad in White is a bound paper pad developed for pastels and markers. The paper has optimum roughness, hardness, and thickness which makes it usable as an underlay and overlay. This pad can be used as rough-sketch, comprehension, presentation and illustration paper.

- B4
- B5
- A3
- A4

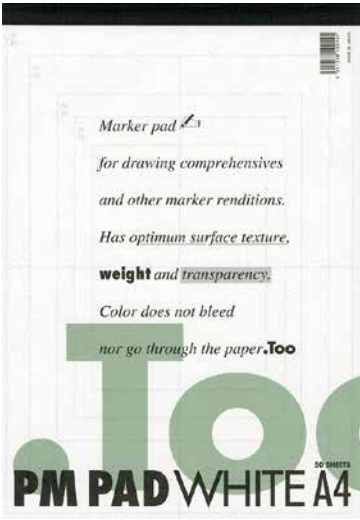

Trepe Pad 50 sheets/book


Transparent matte tracing paper. The Trepe Pad has high transparency and will not have under reflections when working with oil-based markers.

[Thick]

- A2
- A3
- A4

[Thin]

- A2
- A3
- A4
- Cabinet 135x178mm



Trepe Roll

The Trepe Roll is used for illustration drawing, layout, sketch and overlay.

[Thick]

- 1/2 420mmx20m

[Thin]

- 1/2 420mmx20m



Too QROQUIS Book Section

Same transparency as the Too QROQUIS Book with a printed scale.

- B4 70 sheets/book
- B5 70 sheets/book
- A3 60 sheets/book
- A4 70 sheets/book



Sketch Book 20 sheets/book

Pure white paper. Ideal for pencil drawing, watercoloring and ink drawing.

- SM
- F3
- F4
- F6
- F8
- F10
- B4
- B3



NT Cutter

Various versions of the NT Cutter are available.

World bestseller and standard cutter knife.
Excellent quality for cutting paper, film, wallpaper and leather.

- A-300 A Type Blade (Thickness 0.38mm)
with BA Spare Blade 58° 3pcs included



Longtime selling cutter excellent for cutting thick materials
such as cardboard, carpet, floor sheeting, and plywood.
Useful for cutting clay armatures.

- L-500 L Type Blade (Thickness 0.45mm)
with BL Spare Blade 58° 3pcs included



Standard design knife model. Loosen the tip of the knife, insert blade
and fix the blade for use.
Smooth cutting for detailed work such as art and paper cutting work.


- D-400 D Type Blade (Thickness 0.38mm)
with BDA45° · BDC30° Spare Blade 5pcs included



OLFA Cutter

Smooth cutting for detailed work such as art and paper cutting work.

- Craft Art Cutter 141B
with XB141 Spare Blade 30° 10pcs included

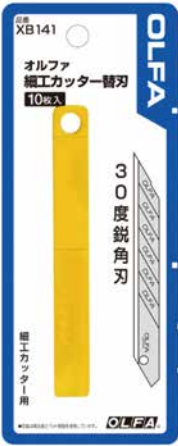


Hot Selling Items!
Made in Japan
cutting edge
cutters.

30°



Professional model for fine work with a stainless body.
It has a self-locking function.

- A-1P A Type Blade(Thickness 0.38mm)
with BA Spare Blade 58° 3pcs included

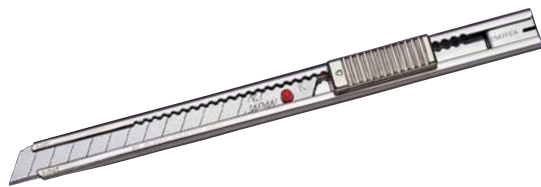

- AD-2P AD Type Blade(Thickness 0.38mm)
with BAD Spare Blade 30° 1pc included



Blade Compatibility Chart NT Cutter

NT Cutter	BA-160	BAD-21P
A-300	●	
L-500		
D-400		
A-1P	●	●
AD-2P	●	●

NT Cutter Spare Blades

- BA-160
A Type Blade 58° 10pcs/set



- BAD-21P
AD Type Blade 30° 10pcs/set



- BL-300
L Type Blade 58° 6pcs/set



- BDA-200P
DA Type Blade 45° 40pcs/set



- BDC-200P
DA Type Blade 30° 40pcs/set



NT Circle Cutter C-1500P

Cuts sizes from 18mm-170mm.
By attaching the beam slide, maximum cutting size would be 400mm.

- C-1500P with Spare Blade 5pcs included



[Beam Slide] for C-1500P

Special extend slide for NT Circle Cutter C-1500P.

- CE-700P



NT Circle Cutter C-2500P

Cuts sizes from 30mm-160mm.
Ideal for cutting thick and hard materials.

- C-2500P with Spare Blade 2pcs included



[Spare Blade BDA-200P] for C-1500P 45° 40pcs/set

[Spare Blade BC-400P] for C-2500P 10pcs/set

[Spare Blade BC-501P] for C-2500P 40pcs/set

Blade Disposer

Aluminum blade disposer that is attachable to belts for easy disposal while working.

- BD-2P



NT Circle Cutter
CL-100P

The NT Circle Cutter CL-100 can precisely cut plywood to thickness from a diameter of 100mm-1000mm.


- CL-100P



Olfa Compass Cutter

Cuts sizes from 10mm-150mm.

- Includes 5 spare blades.

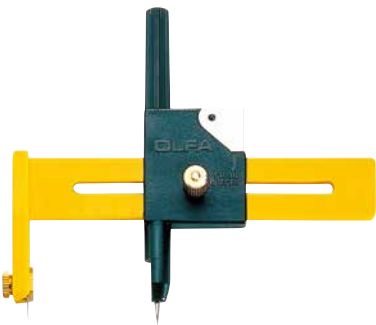

TOOLS INT'L Ellipse Curves 10pcs/set

An essential item for designers. The TOOLS INT'L Ellipse Curves 10pcs/set is arranged with the frequently used oval angles of 15°, 25°, 35°, 45° and 55° between the pitch 2mm-4mm.

- Ellipse Curves 10pcs/set

- 15° 10mm — 52mm
- 15° 56mm — 100mm
- 25° 6mm — 52mm
- 25° 56mm — 100mm
- 35° 4mm — 52mm
- 35° 56mm — 100mm
- 45° 3mm — 52mm
- 45° 56mm — 100mm
- 55° 3mm — 52mm
- 55° 56mm — 100mm



Safety Base


Surface has 50mm sections. Color: Green.
Two available types: Soft (can be stretched back after being rolled up) and Hard (strong body with fine finish).

[Soft type]

- SM2000 300×450×3mm
- MM3900 450×620×3mm
- LM7000 620×900×3mm

[Hard Type]

- SS1000H 220×300×3mm
- SM2000H 300×450×3mm

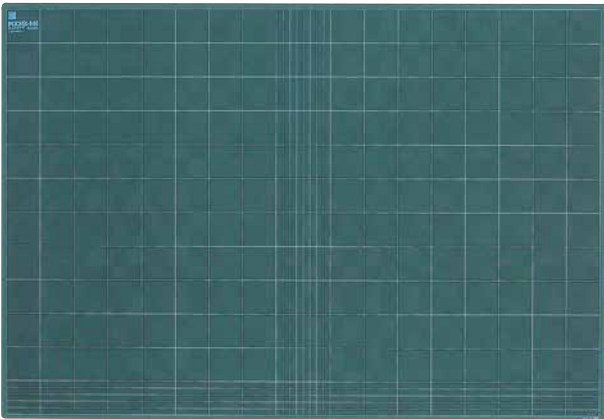

New Tweezer

Stainless light tweezer. Made to last.

- New Tweezer Length 160mm




- New Tweezer Special Version Length 160mm

Developed for medical use.
Sharper tip to hold more precisely.




Circle Ruler Large No.106

- No.106 330×260×0.8mm
(40~90mm with 11 circles)

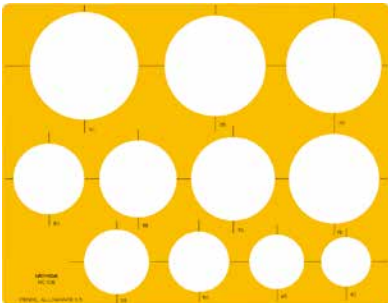

Rib Ruler

- Color: Green
172×173×0.8mm(1~1000mmR)

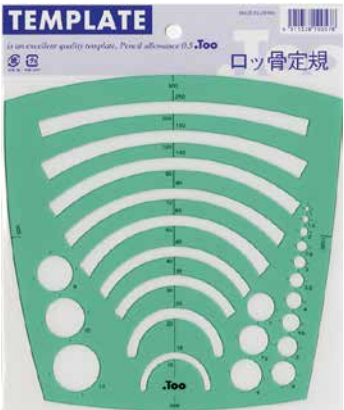

www.toolsintl.jp/en



Tools INT'L Create out of the box thinking.

[FAQ](#) [Contact](#) [Sitemap](#) [Ja](#) [En](#)

[Home](#) [Products](#) [Reasons](#) [Support](#) [Events / News](#) [Company](#)



I N D U S T R I A L C L A Y

● ● ●

Reason why TOOLS INT'L is chosen

Our company specializing in the product design field including the car design makes the best use of accumulating knowhow to provide the necessary materials and service that correspond in the age promptly.

[> Reason why TOOLS INT'L is chosen](#)

Products



Industrial Clay



Film



Clay Modeling Tools



Rendering Tape / Modeling Tape



Clay Modeling Equipments



Copic



Customize / Original Products



Products Catalog

[> Products](#)

TOOLS INT'L Corp also carries and supplies many kinds of design / modeling materials and equipments other than shown in this catalog.
Please feel free to contact us or your nearest global distributor.



TOOLS INT'L Corp.

Sales Department

Products & Services Sales Section

7F, 10-1 Sarugakucho, Shibuya-ku, Tokyo 150-0033, Japan

www.toolsintl.jp/en



The brand name and the company name published in this catalog are, in general, the trademarks and the registration of trademarks of each company.

The images and color charts in this catalog might appear differently from the actual colors.

The commodity use and specifications specified in this catalog are as of September, 2026. These are the subject to change without notice.

The reproduction, the copy, and passing to the third parties of the images, articles, and designs used in this catalog are prohibited.

Copyright ©2026 TOOLS INT'L Corp. All rights reserved. Printed in Japan 20260901 100